



CITY OF VINCENT

LOCAL PLANNING POLICY

BUILT FORM



Acknowledgement of Country

The City of Vincent acknowledges the Traditional Owners of the land, the Whadjuk people of the Noongar nation and pay our respects to Elders past and present.

We recognise the unique and incomparable contribution the Whadjuk people have made and continue to make to our culture and in our community. We will continue to seek the input of the Traditional Owners.

The land on which we live, meet and thrive as a community always was and always will be Noongar land.



CONTENTS

PART 1 PRELIMINARY

- Citation
- Introduction
- Application of this policy
- Built form areas
- Relationship with other documents
- Reading this policy
- Graphic layout
- Policy objectives

PART 2 POLICY PROVISIONS

SECTION 1 LOW-DENSITY DEVELOPMENT

- Element 1** – Street setback
- Element 2** – Lot boundary Setbacks
- Element 3** – Building height
- Element 4** – Setback of carports and garages
- Element 5** – Garage width
- Element 6** – Street surveillance
- Element 7** – Street walls and fences
- Element 8** – Sightlines
- Element 9** – Landscaping
- Element 10** – Parking
- Element 11** – Vehicular access
- Element 12** – Urban design study
- Element 13** – Development on rights of way

7	SECTION 2 MEDIUM-DENSITY DEVELOPMENT
8	Element 1 – Trees and Landscaping
8	Element 2 – Parking
8	Element 3 – Building height
9	Element 4 – Street setbacks
9	Element 5 – Streetscape
9	Element 6 – Access

11 | SECTION 3 HIGH-DENSITY DEVELOPMENT

13

14

15

17

18

20

20

21

22

25

27

29

29

30

31

Element 1 – Building height

Element 2 – Street setbacks

Element 3 – Side and rear setbacks

Element 4 – Tree canopy and deep soil areas

Element 5 – Pedestrian access and entries

Element 6 – Vehicle access

Element 7 – Facade design

Element 8 – Roof design

7	SECTION 2 MEDIUM-DENSITY DEVELOPMENT	33
8	Element 1 – Trees and Landscaping	34
8	Element 2 – Parking	36
8	Element 3 – Building height	36
9	Element 4 – Street setbacks	38
9	Element 5 – Streetscape	41
9	Element 6 – Access	44

SECTION 4 NON-RESIDENTIAL DEVELOPMENT

- Element 1** – Facade design
- Element 2** – Street setbacks
- Element 3** – Side and rear setbacks
- Element 4** – Orientation
- Element 5** – Tree canopy and deep soil areas
- Element 6** – Visual privacy
- Element 7** – Public domain interface
- Element 8** – Pedestrian access and entries
- Element 9** – Vehicle access
- Element 10** – Car and bicycle parking
- Element 11** – Managing the impact of noise
- Element 12** – Universal design
- Element 13** – Facade design
- Element 14** – Roof design
- Element 15** – Landscape design
- Element 16** – Adaptive reuse
- Element 17** – Water management and conservation
- Element 18** – Waste management
- Element 19** – Utilities
- Element 20** – Street walls and fences
- Element 21** – Setback of garages and carports
- Element 22** – Garage width
- Element 23** – Development of rights-of-way

58

59
61
62
64
64
65
66
66
67
68
68
68
69
70
70
70
71
71
71
72
73
73
73

Appendices

Appendix 1 – Design principles	76
Appendix 2 – Definitions	79
Appendix 3 – Streetscape character	81

DATE	DETAILS	STATUS
------	---------	--------



PART 1

PRELIMINARY

CITATION

This policy has been prepared under the provisions of Schedule 2, Part 2, Clause 4 of the *Planning and Development (Local Planning Schemes) Regulations 2015*, clause 3 of the Residential Design Codes Volume 1 and clause 1.2 of the Residential Design Codes Volume 2 (R Codes).

INTRODUCTION

The policy provides planning and design provision for residential and non-residential development throughout the City of Vincent. These provisions enable high-quality, sustainable and context-sensitive design, and ensure development is undertaken to reflect local character and planning priorities.

APPLICATION OF THIS POLICY

There are four volumes of this policy which are applied based on the below table.

Built Form Policy	Single Houses	Group Dwellings	Multiple Dwellings*	Non-residential Development
Section 1: Low-density development	R40 and below	R25 and below	R10 to R25	N/A
Section 2: Medium-density development	R50 and above; R100-SL; R-AC	R30 and above; R100-SL; R-AC	R30 to R60	N/A
Section 3: High-density development	N/A	N/A	R80 and above; R-AC	N/A
Section 4: Non-residential development	N/A	N/A	N/A	All non-residential development

**including dwelling components of mixed use developments*

BUILT FORM AREAS

This policy separates applicable development provisions based on five Built Form Areas to ensure development response to the existing a desired future context. This includes the following and is detailed in **Figure 1: Built Form Areas**:

- Town Centre
- Activity Corridor
- Mixed Use
- Transit Corridor
- Residential


RELATIONSHIP WITH OTHER DOCUMENTS

This policy forms part of the City of Vincent local planning policy framework. Where this policy is inconsistent with the City’s local planning scheme, the local planning scheme prevails. Where this policy is inconsistent with an adopted Local Development Plan or Precinct Structure Plan, the adopted Local Development Plan or Precinct Structure Plan prevails.


Where this Policy is inconsistent with the provisions of a specific Policy, Guidelines, Precinct Structure Plan, Town Centre Planning Framework or Local Development Plan to a particular site or area (e.g. Local Planning Policy: Character Area Guidelines), the provisions of that specific Policy, Guidelines, Precinct Structure Plan or Local Development Plan shall prevail.

READING THIS POLICY

This policy applies varying development standards and local housing objectives based on the applicable Section and Built Form Area.

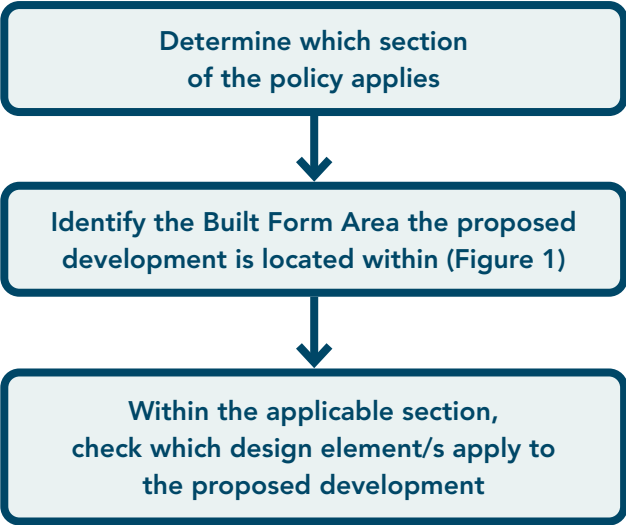

GRAPHIC LAYOUT

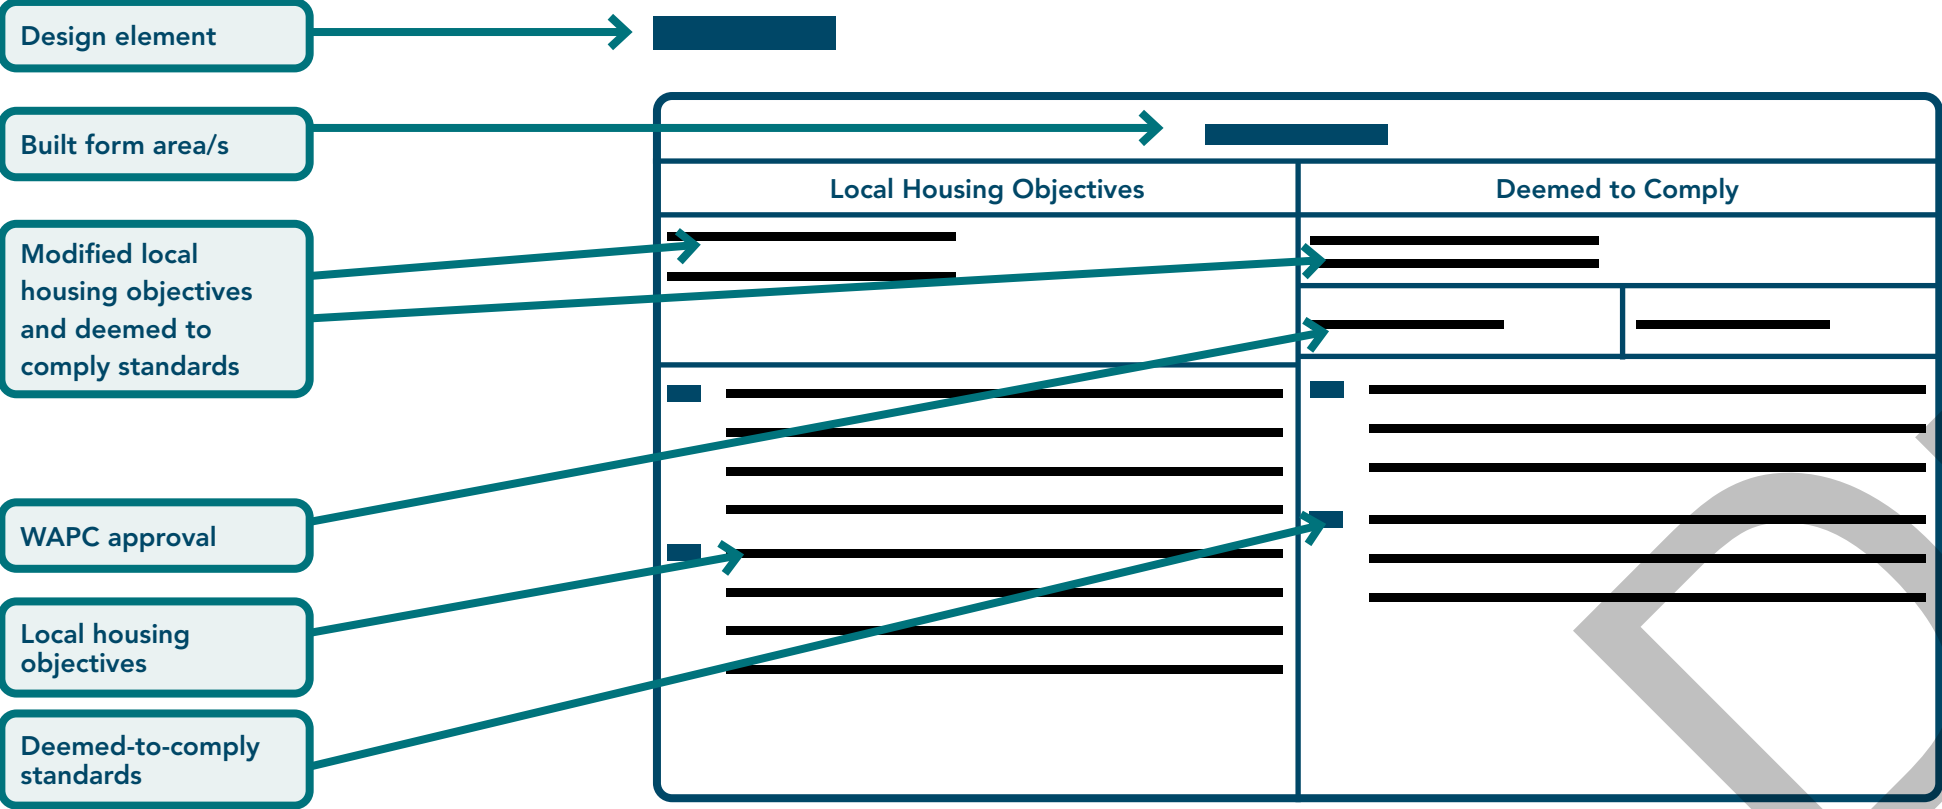

POLICY OBJECTIVES

The objective of this policy is for all development to:

Context

1. Integrate land use, public space and the form of the built environment to enable attractive, interesting outcomes for people.
2. Be respectful of local and historic context.
3. Preserve and reinterpret established built form and social character.
4. Maintain and enhance **amenity**.

Design

5. Be high quality and well-designed, including both **buildings** and **landscaping**.
6. Contribute to public spaces through design and maximise street level interest, **articulation**, materiality, openness, and interaction between inside and outside.
7. Encourage active participation and have a positive influence on public health by improving walkability and interest for people.
8. Design for a human scale, minimising blank walls and the detrimental impacts of services, utilities and car parking structures.
9. Encourage direct street level pedestrian access wherever possible.

10. Incorporate the principles of Crime Prevention through Environmental Design.
11. Respond to future changes in use, lifestyle and demography.
12. Provide sufficient privacy for residents without the need to retrofit screening devices.
13. Provide natural **amenity** and **landscaping**, including areas of deep soil that supports healthy plant and tree growth and contributes to the City's tree canopy, reduces urban heat island effect, and provides natural beauty and **amenity** to residents and visitors.

Sustainability

14. Respond to the changing needs of the community, environment and the economy over time in an efficient, functional and attractive manner.
15. Improve resource, energy and water efficiency throughout the development lifecycle including during construction, maintenance and ongoing use.
16. Incorporate sustainable and energy efficient design that befits the local climate and provides comfortable living conditions while reducing greenhouse gas emissions.

Movement

17. Maximise the opportunities provided by the City of Vincent's proximity to major public transport routes, cycling networks and activity centres.

Housing

18. Provide a range of development types and housing typologies to cater to the needs of the community.
19. Retain and adaptively re-use the City's **building** stock.
20. Provide affordable housing.

Additional objectives specific to Built Form Areas are as follows:

Activity Corridor

21. To improve the built form connection and design between the City's Town Centres.

Mixed Use

22. To provide for a variety of built form that facilitates a positive interaction between a mix of land uses and residential densities.

Transit Corridor

23. To provide for high quality design of medium to high-density residential development.

Residential

24. To provide for high quality design of low, medium and high-density residential development.

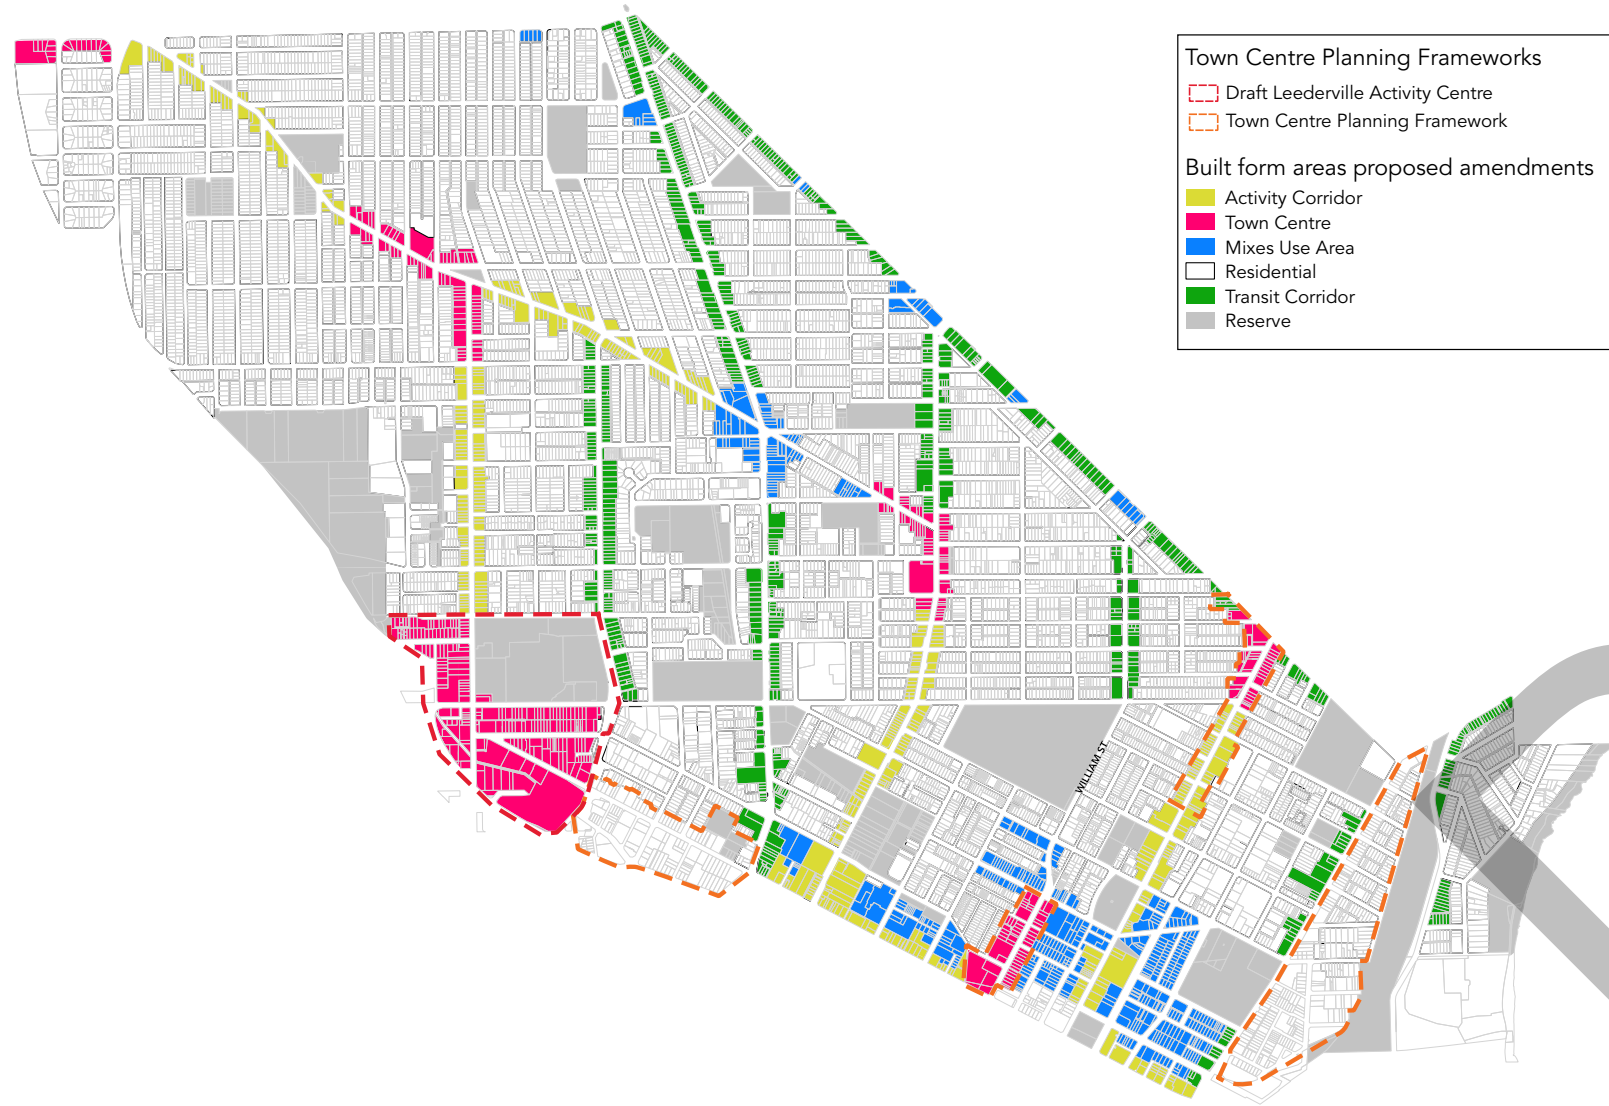


FIGURE 1 – BUILT FORM AREAS

PART 2

POLICY PROVISIONS

SECTION 1

LOW-DENSITY DEVELOPMENT

R CODES VOLUME 1 PART B

1 Street Setback

1.1 Town Centre, Activity Corridor and Mixed Use		
Local Housing Objectives	Deemed to Comply	
O1.1.1 – O1.1.4 augment Clause 5.1.2 P2.1 O1.1.5 augments Clause 5.1.2 P2.2	Replaced: C1.1.1 replaces Clauses 5.1.2 C2.1 and C2.2 Remaining: Clauses 5.1.2 C2.3 and C2.4	
	WAPC approval required? No	WAPC approval date: N/A
O1.1.1 Development which maximises natural light access, natural ventilation, internal and external privacy. O1.1.2 Setbacks that facilitate the provision of landscaping. O1.1.3 Street setbacks that facilitate the provision of useable open space, alfresco dining opportunities and landscaping which contributes to canopy coverage. O1.1.4 Development which activates and addresses rights of way. O1.1.5 Development which incorporates design elements that reduce the impact of building bulk.	C1.1.1 Primary and secondary street setback is nil.	

1.2 Transit Corridor		
Local Housing Objectives	Deemed to Comply	
O1.2.1 – O1.2.3 augment Clause 5.1.2 P2.1 O1.2.4 augments Clause 5.1.2 P2.2	Augmented: C1.2.1 augments Clauses 5.1.2 C2.1 and C2.2 Remaining: Clauses 5.1.2 C2.3 and C2.4	
	WAPC approval required? No	WAPC approval date: N/A
O1.2.1 Development which maximises natural light access, natural ventilation, internal and external privacy. O1.2.2 Setbacks that facilitate the provision of deep soil areas and canopy coverage. O1.2.3 Development which activates and addresses rights of way O1.2.4 Development which incorporates design elements that reduce the impact of building bulk.	C1.2.1 Primary and secondary street setback for the third storey and above must incorporate articulation and the use of varying colours and materials which minimise the bulk and scale of the building on the streetscape.	

Local Housing Objectives		1.3 Residential																												
		Deemed to Comply																												
O1.3.1 and O1.3.2 augment Clause 5.1.2 P2.1 O1.2.3 augments Clause 5.1.2 P2.2		Replaced: C1.3.1 – C1.3.3 replaces Clauses 5.1.2 C2.1 and C2.2 C1.3.4 replaces C2.4 Remaining: Clauses 5.1.2 C2.3																												
		WAPC approval required? No		WAPC approval date: N/A																										
O1.3.1	Development which incorporates predominant features of the streetscape .	C1.3.1 Buildings should be set back from the street boundaries , including rights-of-way , in accordance with the table below.																												
O1.3.2	Development which clearly distinguishes all upper floors from lower storeys to clearly distinguish the parts of the dwelling .	<table><tr><th rowspan="2">Street type</th><th colspan="4">Density Code</th></tr><tr><th>R20</th><th>R25</th><th>R30</th><th>R40</th></tr><tr><td>Primary street</td><td colspan="4">As established in clause 1.3.2</td></tr><tr><td>Secondary street</td><td>1.5m</td><td>1.5m</td><td>1.5m</td><td>1.0m</td></tr><tr><td>Right of way, laneway or communal street^a</td><td>1.0m</td><td>1.0m</td><td>1.0m</td><td>1.0m</td></tr></table>					Street type	Density Code				R20	R25	R30	R40	Primary street	As established in clause 1.3.2				Secondary street	1.5m	1.5m	1.5m	1.0m	Right of way, laneway or communal street ^a	1.0m	1.0m	1.0m	1.0m
Street type	Density Code																													
	R20	R25	R30	R40																										
Primary street	As established in clause 1.3.2																													
Secondary street	1.5m	1.5m	1.5m	1.0m																										
Right of way, laneway or communal street ^a	1.0m	1.0m	1.0m	1.0m																										
O1.3.3	Development which minimises the visual bulk of the buildings through articulation of larger wall lengths and the stepping back of upper storeys walls.																													
		Notes: a. Right of way , laneway or Communal Street setback includes where a right of way or laneway forms the principal frontage and primary street to the dwelling . b. Where road or right of way widening is required, setbacks should be calculated from the adjusted street boundary.																												
		C1.3.2 Buildings to be set back from the street boundary corresponding to the average of the setback of the five properties to each side of the proposed development that front the same street, as follows: a) The setback should be measured from the street boundary to the closest portion of the dwelling . b) Where multiple dwellings are located on one or more of the five properties to each side of the subject site, each development is to be treated as one dwelling for the purposes of this calculation. c) For the purposes of measuring the primary street setback , the following buildings are not to be included: i. porches, verandahs, patios, carports, balconies and the like; and ii. Garages that are, unenclosed except where they abut a dwelling and may have a door that is visually permeable. This includes garages that received approval as ' carports ' under previous versions of the Residential Design Codes.																												
		<table><tr><th>Street Type</th><th>Walls of Upper Storeys</th><th>Balconies</th></tr><tr><td>Primary Street including right-of-way or laneway as Primary Street</td><td>Setback an additional 2.0m from the street boundary than the ground floor.</td><td>Setback an additional 1.0m from the street boundary than the ground floor.</td></tr><tr><td>Secondary Street</td><td>Setback an additional 1.5m from the street setback provided to the storey below.</td><td>No Additional Requirement</td></tr></table>					Street Type	Walls of Upper Storeys	Balconies	Primary Street including right-of-way or laneway as Primary Street	Setback an additional 2.0m from the street boundary than the ground floor.	Setback an additional 1.0m from the street boundary than the ground floor.	Secondary Street	Setback an additional 1.5m from the street setback provided to the storey below.	No Additional Requirement															
Street Type	Walls of Upper Storeys	Balconies																												
Primary Street including right-of-way or laneway as Primary Street	Setback an additional 2.0m from the street boundary than the ground floor.	Setback an additional 1.0m from the street boundary than the ground floor.																												
Secondary Street	Setback an additional 1.5m from the street setback provided to the storey below.	No Additional Requirement																												
		Notes: 1. For measuring the ground floor primary street setback , the measurement is to be taken from the street boundary to the closest portion of wall to the dwelling . Elements identified in Clause 1.3.2 (c) are to be excluded.																												
		C1.3.4 An unenclosed porch, verandah or the equivalent may (subject to the Building Codes of Australia) project into the primary street setback area to a maximum of half the required primary street setback area .																												

2 Lot boundary setbacks

2.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential				
Local Housing Objectives		Deemed to Comply		
O2.1.1	augments Clause 5.1.3 and P3.1	Replaced: C2.1.1 and C2.1.2 replaces Clause 5.1.3 C3.1 (i), (ii) and (v) Remaining: Clauses 5.1.3 C3.1 (iii), (iv), (vi), C3.2, C3.3 and C3.4		
O2.1.2	augments Clause 5.1.3 and P3.2			
		WAPC approval required? Yes	WAPC approval date:	
O2.1.1	Development which appropriately addresses rights of way to facilitate spaces which are welcoming and safe for residents and visitors.	C2.1.1 Buildings are set back from lot boundaries in accordance with the following, subject to any additional measures in other elements of the R-Codes: i. Buildings set back from lot boundaries in accordance with Table 1 . ii. For carports, patios, verandahs or equivalent structures, the lot boundary setbacks in Table 1 may be reduced to nil to the posts where the structure: • is not more than 10m in length and 2.7m in height • is located behind the primary street setback • has leaves, gutters and roofs set back at least 450mm from the lot boundary. iii. Where development adjoins a right of way the setback should be measured from the midpoint of the right of way . C2.1.2 The second storey of walls should be set back in accordance with Table 1 for a maximum wall length of 14m (including any balconies). For a portion of wall exceeding 14m in length: i. The wall should be set back 3m from the lot boundary for the remainder of its length. ii. Contain a minimum 3m x 3m separation measured from the lot boundary (Refer Figure 2).		
O2.1.2	Where an adjoining property is vacant of development, buildings are designed as to not adversely impact potential future outdoor living areas by the way of visual amenity and overshadowing.			

TABLE 1

Wall height ¹	Minimum lot boundary setback
Up to 3.5m	1m
3.6m – 7m	1.5m
7.1m – 10m	3m
10.1m and above	3m

¹Rounded to the nearest 0.1m

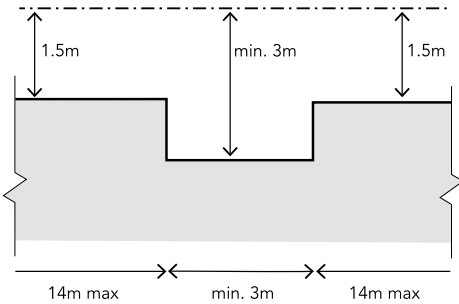


FIGURE 2

3 Building height

3.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential					
Local Housing Objectives			Deemed to Comply		
O3.1 – O3.4 augment Clause 5.1.6 P6			Replaced: C3.1.1 – C3.1.2 replace Clause 5.1.6 C6		
			Remaining: None		
			WAPC approval required? Yes		WAPC approval date:
O3.1	Height that is situated on a site to minimise amenity impacts to neighbouring properties, heritage places and the streetscape.		C3.1.1	Development that is consistent with the building heights provided in Table 2a and Table 2b and Figure 3.	
O3.2	Development that incorporates design measures to reduce the impact of height, bulk and scale in neighbouring properties and the streetscape.		C3.1.2	External fixtures may extend beyond the maximum height in Table 2a or 2b where they are not visible from the street or neighbouring properties.	
O3.4	Design which is complimentary to existing developments.				

TABLE 2A

Town Centre, Activity Corridor, Mixed Use and Transit Corridor					
Number of storeys	Top of external wall (roof above)	Top of external wall (concealed roof)	Bottom of skillion roof	Top of skillion roof	Top of pitched roof
2	7.1m	8.1m	7.1m	8.1m	10.1m
3	10.2m	11.2m	10.2m	11.2m	13.2m
4	13.3m	14.3m	13.3m	14.3m	16.3m
5	16.4m	17.4m	16.4m	17.4m	19.4m
6	19.5m	20.5m	19.5m	20.5m	22.5m
7	22.6m	23.6m	22.6m	23.6m	25.6m
8	25.7m	26.7m	25.7m	26.7m	28.7m

TABLE 2B

Town Centre, Activity Corridor, Mixed Use and Transit Corridor					
Number of storeys	Top of external wall (roof above)	Top of external wall (concealed roof)	Bottom of skillion roof	Top of skillion roof	Top of pitched roof
1	3m	4m	3m	4m	6m
2	6m	7m	6m	7m	9m
3	9m	10m	9m	10m	12m
4	12m	13m	12m	13m	15m
5	16m	17m	16m	17m	18m

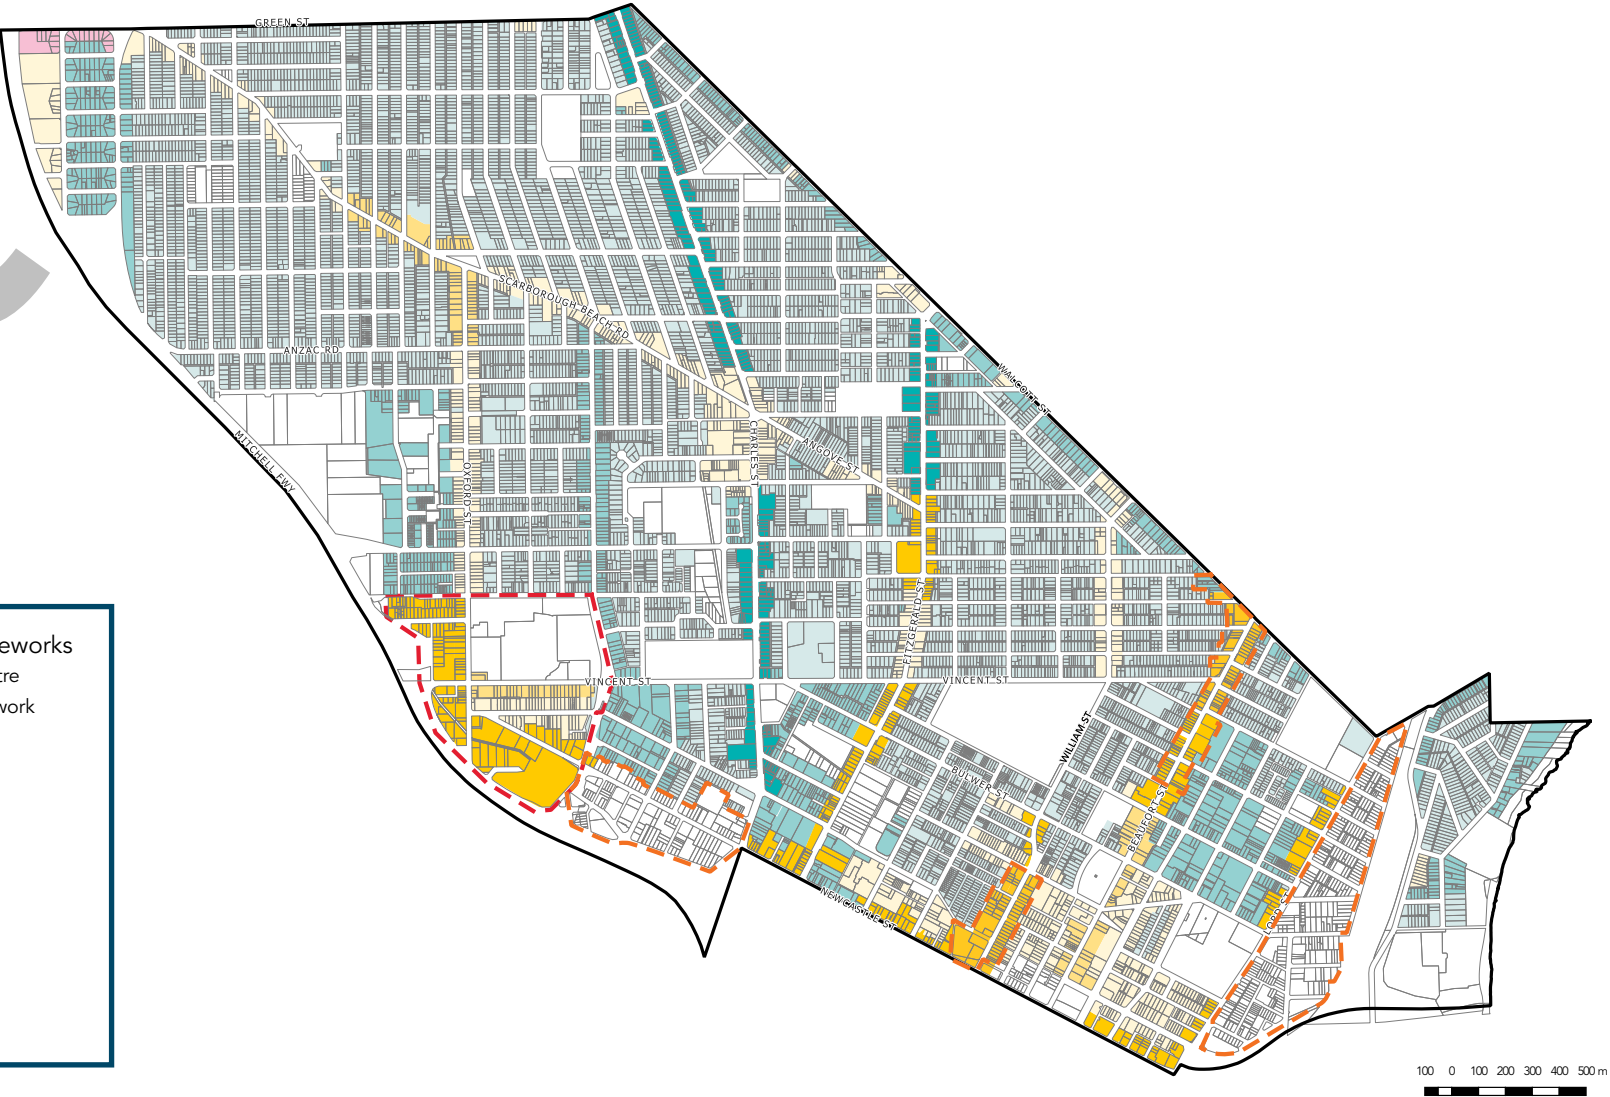
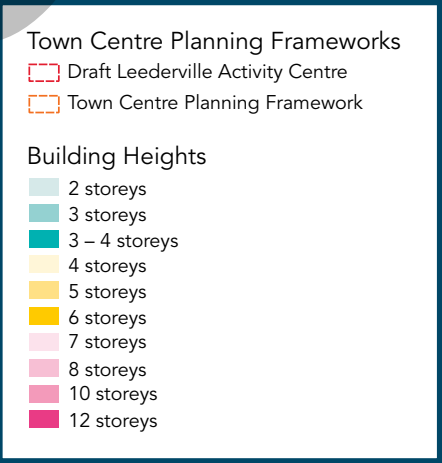


FIGURE 3 – BUILDING HEIGHTS

4 Setback of carports and garages

3.1 Residential			
Local Housing Objectives		Deemed to Comply	
O4.1.1 and O4.1.2 augment Clause 5.2.1 P1.1		Replaced: C4.1.1 replaces Clause 5.2.1 C1.1 C4.1.2 – C4.1.6 replace Clause 5.2.1 C1.2 Remaining: Clause 5.2.1 C1.3 and C1.4	
		WAPC approval required? No	WAPC approval date: N/A
O4.1.1	The setting back of carports and garages to maintain clear sight lines along the street and not to detract from the streetscape or appearance of dwelling s; or dominate views of dwelling s from the street and vice versa.	C4.1.1	Garages should be setback a minimum of 500mm behind the dwelling alignment (excluding any porch portico verandah or balcony or the like).
O4.1.2	Development which preserves and enhances the visual character of the existing streetscape by considering building bulk, scale, setbacks and design.	C4.1.2	Carports should be setback in accordance with Clause C1.3.1 and C1.3.2 of this Policy. This setback may be reduced in accordance with Clause 5.1.2 C2.1 iii of the R Codes Volume 1.
		C4.1.3	Garages and carports must match the existing dwelling s predominant colour, scale and materials and must be complementary and subservient to the dwelling .
		C4.1.4	Carports must provide an unobstructed view to major openings of the dwelling from the street. Gates or doors to carports are required to be visually permeable .
		C4.1.5	Carports should allow light and ventilation to the major openings of the dwelling .
		C4.1.6	The total width of any carport within the street setback area is not to exceed 50 per cent of the frontage (including strata lots) of the lot or 6m whichever is the lesser.

Note: The above standard and objectives do not apply to Town Centre, Activity Corridor, Mixed Use or Transit Corridor Built Form Areas.

5 Garage width

5.1 Residential			
Local Housing Objectives		Deemed to Comply	
O5.1.1 augments Clause 5.2.2 P2		Replaced: C5.1.1 and C5.1.2 replace Clause 5.2.2 C2 Remaining: None	
		WAPC approval required? No	WAPC approval date: N/A
O5.1.1	Development which preserves and enhances the visual character of the existing streetscape .	C5.1.1	Garages which are 50 per cent or less than the width of the lot.
		C5.1.2	For lots less than 10m wide, garages which are a maximum of 4m wide.

Note: The above standard and objectives do not apply to Town Centre, Activity Corridor, Mixed Use or Transit Corridor Built Form Areas.

6 Street Surveillance

6.1 Residential			
Local Housing Objectives		Deemed to Comply	
O6.1.1 augments Clause 5.2.3 P3		C6.1.1 augments Clause 5.2.3 C3.1	
		WAPC approval required? No	WAPC approval date: N/A
O6.1.1	Where Part 5 of the R Codes applies, and for all other development, all Design Principles of clause 5.2.3 of the R Codes apply.	C6.1.1 The primary street elevation of the dwelling should address the street and should include the main entry (front door) to the dwelling (refer to Figure 4).	
		Sites which about a right of way and do not designate another primary street should address the right of way as though it were its primary street for the purposes of this clause.	

Note: The above standard and objectives do not apply to Town Centre, Activity Corridor, Mixed Use or Transit Corridor Built Form Areas.

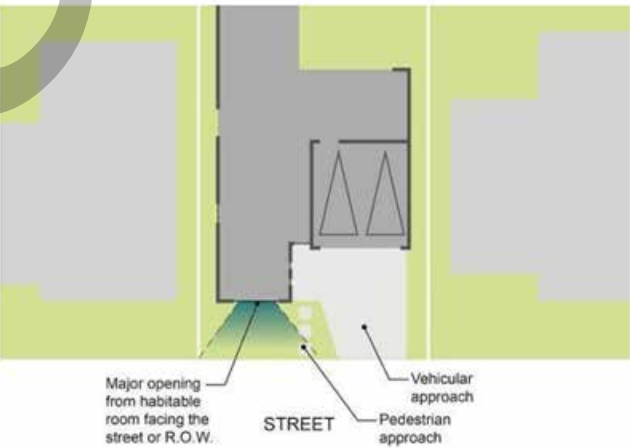


FIGURE 4

7 Street walls and fences

7.1 Transit Corridor			
Local Housing Objectives		Deemed to Comply	
O7.1.1	augments Clause 5.2.4 P4	Replaced: C7.1.1 – 7.1.6 replace Clause 5.2.4 C4.1 and C4.2 Remaining: None	
		WAPC approval required? No	WAPC approval date:N/A
O7.1.1	Development which preserves and enhances the visual character of the existing streetscape by considering bulk, scale, setbacks , design, relationship between the private and public domain, and fencing styles.	C7.1.1 Street walls, street fences and gates should be of a style and materials compatible with those of the development on site and/or walls, fences and gates of the immediate surrounding area excluding fibre cement. C7.1.2 Street walls, fences and gates within the primary street setback area, including along the side boundaries, and front walls and fences to new dwellings fronting a right of way or dedicated road to be as follows: - Maximum height of 1.8m above the natural ground level; - Maximum height of piers with decorative capping to be 2m above the natural ground level; - Maximum height of solid portion of wall to be 1.2m above adjacent footpath level and should be visually permeable above 1.2m; - Posts and piers should have a maximum width 400mm and a maximum diameter of 500mm; and - The distance between piers should not be less than the height of the piers except where pedestrian gates are proposed. C7.1.3 Street walls, fences and gates to secondary streets , behind the primary street setback line , or walls, fences and gates to the primary streets where those streets are district distributor roads to be as follows: - Solid portion of wall may increase to a maximum height of 1.8m above adjacent footpath level provided that the wall or fence has at least two significant appropriate design features (to the satisfaction of the City) to reduce the visual impact – for example, significant open structures, recesses and/or planters facing the road at regular intervals and varying materials, finishes and/or colours. - Maximum height of piers with decorative capping to be 2m above adjacent footpath level. C7.1.4 Exposed boundary walls visible to the street should incorporate the following design features: - indentations - varying heights - varying materials, colours and textures - public artwork C7.1.5 Any proposed vehicular or pedestrian entry gates should be visually permeable . C7.1.6 Walls and fences on the side boundaries, only within the primary street setback area, constructed from metal sheeting are permitted provided they meet all other requirements relating to height , provide adequate sight lines and are not a side boundary fence facing a secondary street .	

7.2 Residential			
Local Housing Objectives		Deemed to Comply	
O7.1.1	augments Clause 5.2.4 P4	Replaced: C7.1.1 – 7.1.4 replace Clause 5.2.4 C4.1 and C4.2 Remaining: None	
		WAPC approval required? No	WAPC approval date:N/A
O7.2.1	Front fences and walls which enable surveillance and enhance streetscape .	C7.2.1 Street walls, street fences and gates should be of a style and materials compatible with those of the development on site and/or walls, fences and gates of the immediate surrounding area excluding fibre cement. C7.2.2 Street walls, fences and gates within the primary street setback area, including along the side boundaries, and front walls and fences to new dwellings fronting a right of way or dedicated road to be as follows: - Maximum height of 1.8m above the natural ground level; - Maximum height of piers with decorative capping to be 2m above the natural ground level; - Maximum height of solid portion of wall to be 1.2m above adjacent footpath level and should be visually permeable above 1.2m; - Posts and piers should have a maximum width 400mm and a maximum diameter of 500mm; and - The distance between piers should not be less than the height of the piers except where pedestrian gates are proposed. C7.1.3 Street walls, fences and gates to secondary streets , behind the primary street setback line , or walls, fences and gates to the primary streets where those streets are district distributor roads to be as follows: - Solid portion of wall may increase to a maximum height of 1.8m above adjacent footpath level provided that the wall or fence has at least two significant appropriate design features (to the satisfaction of the City of Vincent) to reduce the visual impact – for example, significant open structures, recesses and/or planters facing the road at regular intervals and varying materials, finishes and/or colours; and - Maximum height of piers with decorative capping to be 2m above adjacent footpath level. C7.1.4 Walls, fences and gates on the side boundaries within the primary street setback area , constructed from metal sheeting are permitted provided they meet all other requirements relating to height , provide adequate sight lines and are not a side boundary fence facing a secondary street .	
O7.2.2	Development which adds interest to the street and minimises blank facades.		

Note: The above standard and objectives do not apply to Town Centre, Activity Corridor or Mixed Use Built Form Areas.

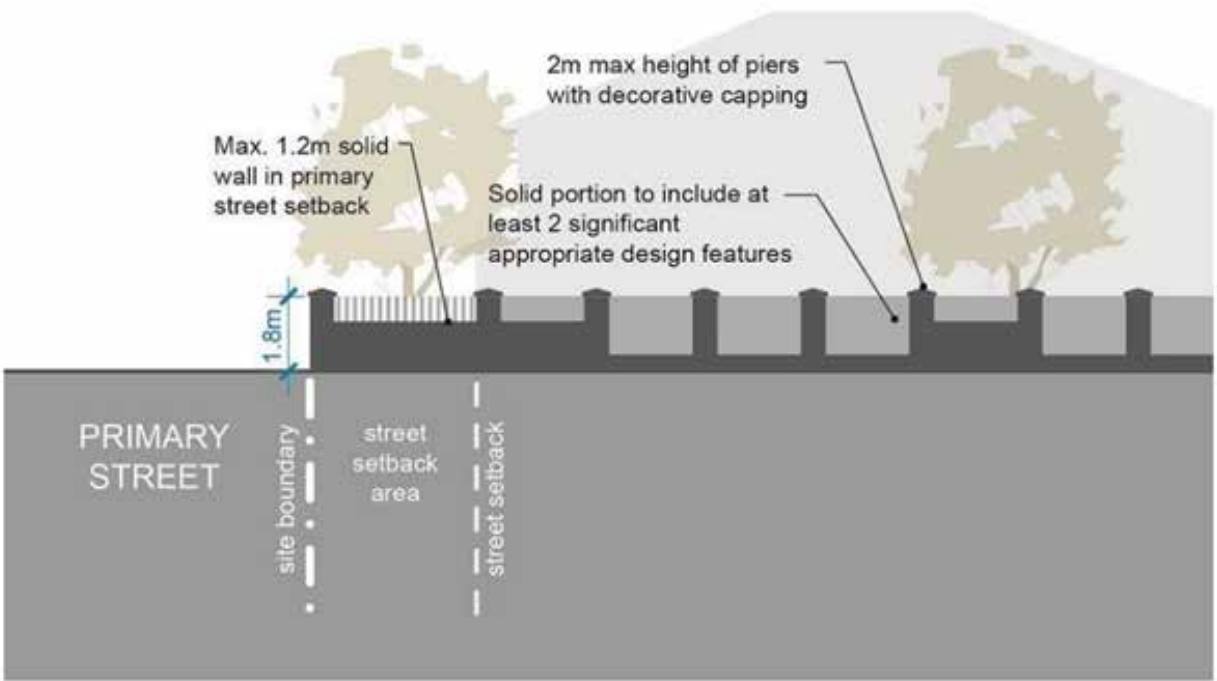


FIGURE 5

8 Sightlines

8.1 Residential		
Local Housing Objectives		Deemed to Comply
O8.1.1	augments Clause 5.2.5 P5	Replaced: C8.1.1 – C8.1.3 replaces Clause 5.2.5 C5 Remaining: None
O8.1.1		WAPC approval required? Yes
O8.1.1		WAPC approval date:
O8.1.1		Development which allows safe vehicle movement between the private and public domain.
O8.1.1		Except where required for manoeuvring of vehicles, structures within visual truncation areas as required in Table 4 are: i. Provide a Clear Sight Line above 0.75m from the natural ground level ; and ii. No greater than 0.35m x 0.35m in dimension, or 0.5m in diameter.
O8.1.1		Notwithstanding C8.1.1, the following structures may be in visual truncation areas: - One pier/pillar with a maximum width and depth of 400mm and 1.8m height above natural ground level, or 2.0m tall to the top of decorative capping above the natural ground level. - If a gate is proposed across a vehicle access point where a driveway meets a public street and where two streets intersect, the gate must provide: - When Closed: a minimum of 50 per cent unobstructed view. - When Open: a Clear Sight Line from 0.75m above the natural ground level within 1.5m of where the vehicle access way joins the street.
O8.1.1		No structures are located within a 1m x 1m truncation where a right of way intersects another right of way or driveway .

Note: The above standard and objectives do not apply to Town Centre, Activity Corridor, Mixed Use or Transit Corridor Built Form Areas.



TABLE 4

Road A	Road B	Sightline Area	Exemption
Vehicle Access Point or Driveway	Right of way or Laneway	1.0m x 1.0m	No sightline required for: ‘Entry only’ vehicle access points or driveways; - The entry side of two-way vehicle access points that are 6.0m or greater in width, and signage and line markings are provided.
Vehicle Access Point or Driveway	Local Access Road	1.5m x 1.5m	
Right of way	Local access road or right of way	2m x 2m	Otherwise specified in the Metropolitan Region Scheme (MRS)
Local road (includes Local Distributor Road)	Local road (includes Local Distributor Road) or District/Primary Distributor road	3m x 3m	Otherwise specified in the MRS
District/Primary Distributor road	District/Primary Distributor road	6m x 6m	Otherwise specified in the MRS

9 Landscaping

9.1 Town Centre, Activity Corridor and Mixed Use			
Local Housing Objectives		Deemed to Comply	
O9.1 – O9.4 augment Clause 5.3.2 P2		Replaced: C9.1.1 – C9.1.3 replace Clause 5.3.2 C2.2 Remaining: Clause 5.3.2 C2.1	
		WAPC approval required? Yes	WAPC approval date:
O9.1	Development provides sufficient deep soil area to sustain healthy tree and plant growth, providing for an increase in urban tree canopy over time, and assist in managing the quantity and quality of stormwater.	C9.1.1	Development to provide a minimum 20 per cent soft landscaping per site with a minimum dimension of 1m.
O9.2	Development that prioritises the retention of mature and healthy trees.	C9.1.2	A minimum number of trees to be planted in accordance with Table 5 and provided with the required deep soil area per tree in accordance with Table 6 .
O9.3	The provision of a combination of evergreen and deciduous plant species which would improve the thermal performance of the development.	C9.1.3	Where a significant existing tree is retained on site, a tree protection zone should be provided in accordance with AS4970.
O9.4	Landscaping is integrated with useable outdoor space to create greater natural amenity for occupants.		

9.2 Transit Corridor and Residential			
Local Housing Objectives		Deemed to Comply	
O9.1 – O9.4 augment Clause 5.3.2 P2		Replaced: C9.1.1 – C9.1.3 replace Clause 5.3.2 C2.2 Remaining: Clause 5.3.2 C2.1	
		WAPC approval required? Yes	WAPC approval date:
O9.1	Development provides sufficient deep soil area to sustain healthy tree and plant growth, providing for an increase in urban tree canopy over time, and assist in managing the quantity and quality of stormwater.	C9.2.1	Development to provide a minimum 20 per cent soft landscaping per site with a minimum dimension of 1m.
O9.2	Development that prioritises the retention of mature and healthy trees.	C9.2.2	A minimum number of trees to be planted in accordance with Table 5 and provided with the required deep soil area per tree in accordance with Table 6 .
O9.3	The provision of a combination of evergreen and deciduous plant species which would improve the thermal performance of the development.	C9.2.3	The primary street setback area should provide a minimum 50 per cent soft landscaping .
O9.4	Landscaping is integrated with useable outdoor space to create greater natural amenity for occupants.	C9.2.4	Where a significant existing tree is retained on site, a tree protection zone should be provided in accordance with AS4970.

TABLE 5

Dwelling type		Minimum tree requirements
Single house (per dwelling)*	2 small trees	1. Where the primary street setback is 4m or greater: Frontages less than 20m but no less than 12m: 2 small trees in the primary street setback area. OR Frontages 20m or greater: 2 small trees in the primary street setback area per 10m frontage . 2. Where the primary street setback is 1.5m or greater: Frontages less than 20m: 1 small tree in the primary street setback area. OR Frontages 20m or greater: 1 small tree in the primary street setback area per 10m frontage .
Grouped dwellings (per dwelling)*	1 small tree	
Multiple dwellings (per lot)**	Sites less than 700m	1 medium tree and 2 small trees
	Sites of 700 – 1000m ²	2 medium trees or 1 large tree and 1 small tree
	Sites greater than 1000m ²	2 medium trees or 1 large tree and 1 small tree PLUS 1 medium tree per 400m ² in excess of 1000m ² or part thereof

Notes: *No tree is required where a **significant existing tree** is retained outside of the street **setback** area. No trees are required within the street **setback** area where a significant existing tree is retained.
** Two less small trees or medium tree is required where a significant existing tree is retained.

TABLE 6

Table 1.2b Tree size and **deep soil area**

Tree size	Tree specifications			
	Canopy diameter at maturity	Tree height at maturity	Minimum deep soil area	Minimum deep soil area dimension
Small	2 – 6m	3 – 8m	9m ²	1.5m
Medium	6 – 9m	8 – 12m	36m ²	3m
Large	> 9m	>12m	64m ²	6m

Notes: Refer to figure 1.2d of the R Codes for the provision of **deep soil area** for tree requirements.
The above standard and objectives do not apply to Town Centre, Activity Corridor, Mixed Use or Transit Corridor Built Form Areas.

10 Parking

10.1 Town Centre, Activity Corridor and Mixed Use
Local Housing Objectives

- O10.1.1** augments P3.2
O10.1.1 Suitable end of trip facilities should be included in the initial design of the **building**.

Note: The above standard and objectives do not apply to Transit Corridors or Residential Built Form Areas.

11 Vehicular access

11.1 Town Centre, Activity Corridor and Mixed Use
Local Housing Objectives

- O11.1.1 – 11.1.5** augments Clause 5.3.5 P5.2
O11.1.1 Vehicle access to and from site should be safe, manageable and convenient.
O11.1.2 Pedestrian priority and safety should be ensured by minimising the number, location and design of vehicle **crossovers**.
O11.1.3 Minimise breaks in the street wall to maximise **active frontages**.
O11.1.4 Service areas, loading bays and vehicle entrances should gain access from the **secondary street** or **right of way** where ever possible.
O11.1.5 Maximise the retention of existing mature vegetation through the location and design of vehicle access.

Note: Vehicle access does not apply to Town Centre, Activity Corridor, Mixed Use or Transit Corridor Built Form Areas.

12 External fixtures, utilities and facilities

11.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential		
Local Housing Objectives		Deemed to Comply
O11.1.1	augments Clause 5.4.4 P4.1	C11.1.1 – C11.1.3 replaces Clause 5.4.4 C4.1 – C4.7, C4.6 and C4.7 Remaining: Clause 5.4.4 C4.5
		WAPC approval required? NoWAPC approval date:
O11.1.1	Solar panels are located as to not be directly visible from adjoining properties or the street.	C11.1.1 Service utilities are designed and located such that they: i. are accessible and can be safely maintained; ii. maintain clear sightlines for vehicle access; and iii. integrated into the design of the development and/or screened from view of the street. C11.1.2 Functional utilities (with the exception of solar collectors and electric vehicle charging): i. are located behind the primary street setback and not visible from the primary street; ii. are designed to integrate with the development; and iii. are located and/or screened so that they are not visually obtrusive and minimise the impact of noise sources to habitable rooms and private open space both on the development site and adjoining properties. C11.1.3 For single houses and grouped dwellings, air conditioning fixtures should be placed at the rear of the ground floor. The highest point of the air conditioning fixture should be a maximum 1.8m above natural ground level or below the existing fence line, whichever is lesser.

13 Urban design study

12.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential	
Local Housing Objectives	
An Urban Design Study should be submitted with the application for development approval and must consider all of the following local housing objectives:	
O12.1.1	Appropriate use of a variety of materials and finishes that complement elements of the existing local character whilst avoiding the use of faux (made as an imitation, fake or false) materials.
O12.1.2	Articulation that uses architectural elements in addition to setbacks to reduce its impact on adjoining properties and improves the amenity of adjoining properties and the streetscape .
O12.1.3	Fire boosters, mail boxes and external fixtures that are integrated in the early design stage and located to minimise the impact on the public realm.
O12.1.4	Development that achieves visual interaction with the vehicle and pedestrian approaches.
O12.1.5	Development which integrates and/or acknowledges the design elements and character of the streetscape identified in the Urban Design Study.
O12.1.6	Development which incorporates the design elements of the predominant streetscape character of the urban design study area outlined in Appendix 2.
O12.1.7	Development on corner sites that is designed to express significance and frame the corner to define the built form and give a strong edge to the public realm.
O12.1.8	Development expressed with strong visual elements that integrate with all street frontages and right of ways .
O12.1.9	Create cohesion of all street frontages and contribute to a comfortable pedestrian environment by addressing each frontage with passive surveillance and safe sight lines.
O12.1.10	Development should integrate with adjoining public spaces by including visual surveillance or clearly visible entrances and paths directly onto the public space.
O12.1.11	Emphasise vertical articulation to break up building mass and highlight street level uses and details.
O12.1.12	Development designed to be adaptive and cater for changing uses over time within the relevant zone.
O12.1.13	High quality durable materials and textures used at street level and upper levels which express the architectural style of the surrounding context.
O12.1.14	Design which is responsive to any existing and/or proposed verge trees and will promote greening in town centres.

14 Development on Rights of Way

13.1 Residential	
Local Housing Objectives	
O13.1	Development which appropriately addresses rights of way to facilitate spaces which are welcoming and safe for residents and visitors.
O13.2	Development which provides appropriate pedestrian access to a dedicated road with suitable space for service areas and waste management.
O13.3	Development which provides suitable space for safe vehicle movement in the right of way .
O13.4	Development on rights of ways should be in accordance with the Western Australian Planning Commission’s Planning Bulletin 33 Rights of Way or Laneways in Established Areas – Guidelines.
Orientation	
O13.5	Where a dwellings’ primary street frontage is a right of way , or where no primary street or secondary street frontage exists, should be oriented to address the right of way using clearly defined entry points and major openings as if it were a primary street .
Setbacks	
O13.6	Development must be setback 1m from a right of way . If the site is subject to right of way widening, the setback is measured from the new lot boundary after the widening is applied Clause C5.2.1 of the R Codes is replaced by this clause where development has its primary street frontage to a right of way .
Access	
O13.7	Each lot that does not have direct frontage to a dedicated road should be provided with a pedestrian access way to a dedicated road . The width of the pedestrian access way should be 1.5m.
O13.8	Access to a right of way is required to be trafficable to the nearest dedicated road . The cost to upgrade a right of way to make it trafficable should be borne by the applicant.



FIGURE 6

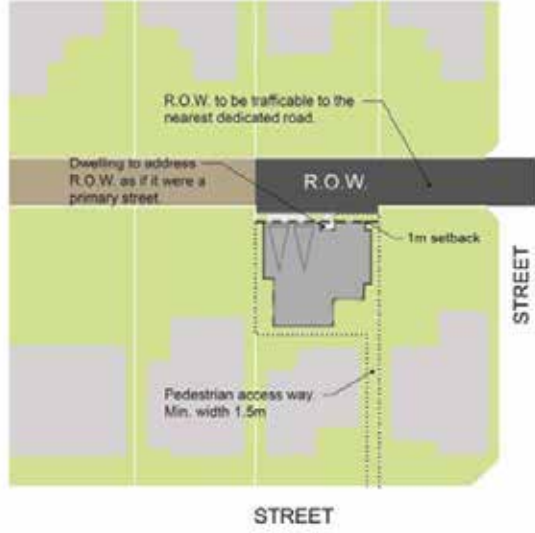


FIGURE 7



SECTION 2

MEDIUM-DENSITY DEVELOPMENT (R CODES VOLUME 1 PART C)

1 Trees and Landscaping

1.1 Town Centre, Activity Corridor and Mixed Use			
Local Housing Objectives		Deemed to Comply	
O1.1.1	augments Clause 1.2 P1.2.1 O1.1.2 and O1.1.3 augment P1.2.2	Replaced: C1.1.1 replaces Clause 1.2 C1.2.1 and C1.2.2 C1.1.2 replaces Clause 1.2 C1.2.4 Remaining: Clause 1.2 C1.2.3, C1.2.5 – C1.2.8	
		WAPC approval required? Yes	WAPC approval date:
O1.1.1	Development that prioritises the retention of mature and healthy trees.	C1.1.1 Development to provide a minimum 18 per cent soft landscaping per site with a minimum dimension of 1m.	
O1.1.2	The provision of a combination of evergreen and deciduous plant species which would improve the thermal performance of the development.	C1.1.2 A minimum number of trees to be planted in accordance with Table 7 and provided with the required deep soil area per tree in accordance with Table 8 .	
O1.1.3	Landscaping is integrated with useable outdoor space to create greater natural amenity for occupants.		

1.2 Transit Corridor and Residential			
Local Housing Objectives		Deemed to Comply	
O1.2.1	augments Clause 1.2 P1.2.1 O1.2.2 and O1.2.3 augment P1.2.2	Replaced: C1.1.1 replaces Clause 1.2 C1.2.1 and C1.2.2 C1.1.2 replaces Clause 1.2 C1.2.4 Remaining: C1.2.2, C1.2.3, C1.2.5 – C1.2.8	
		WAPC approval required? Yes	WAPC approval date:
O1.2.1	Development that prioritises the retention of mature and healthy trees.	C1.1.1 Development to provide a minimum 18 per cent soft landscaping per site with a minimum dimension of 1m.	
O1.2.2	The provision of a combination of evergreen and deciduous plant species which would improve the thermal performance of the development.	C1.1.2 A minimum number of trees to be planted in accordance with Table 7 and provided with the required deep soil area per tree in accordance with Table 8 .	
O1.2.3	Landscaping is integrated with useable outdoor space to create greater natural amenity for occupants.		

TABLE 7

Dwelling type	Minimum tree requirements	
Single house (per dwelling)*	2 small trees	1. Where the primary street setback is 4m or greater: Frontages less than 20m but no less than 12m: 2 small trees in the primary street setback area. OR Frontages 20m or greater: 2 small trees in the primary street setback area per 10m frontage .
Grouped dwellings (per dwelling)*	1 small tree	2. Where the primary street setback is 1.5m or greater: Frontages less than 20m: 1 small tree in the primary street setback area. OR Frontages 20m or greater: 1 small tree in the primary street setback area per 10m frontage .
Multiple dwellings (per lot)**	Sites less than 700m	1 medium tree and 2 small trees
	Sites of 700 – 1000m ²	2 medium trees or 1 large tree and 1 small tree
	Sites greater than 1000m ²	2 medium trees or 1 large tree and 1 small tree PLUS 1 medium tree per 400m ² in excess of 1000m ² or part thereof

Notes: *No tree is required where a significant existing tree is retained outside of the street **setback** area. No trees are required within the street **setback** area where a significant existing tree is retained.
** Two less small trees or medium tree is required where a significant existing tree is retained.

TABLE 8

Table 1.2b Tree size and deep soil arew

Tree size	Tree specifications			
	Canopy diameter at maturity	Tree height at maturity	Minimum deep soil area	Minimum deep soil area dimension
Small	2 – 6m	3 – 8m	9m ²	1.5m
Medium	6 – 9m	8 – 12m	36m ²	3m
Large	> 9m	>12m	64m ²	6m

Refer to figure 1.2d of the R Codes for the provision of **deep soil area** for tree requirements.

2 Parking

1.1 Town Centre, Activity Corridor and Mixed Use	
Local Housing Objectives	
O2.1.1	augments Clause 2.3 P2.3.2
O2.1.1	Suitable end of trip facilities should be included in the initial design of the building .
Notes: The above standard and objectives do not apply to Transit Corridor or Residential Built Form Areas.	

3 Building height

3.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential	
Local Housing Objectives	Deemed to Comply
O3.1.1 and O3.1.2 augment Clause 3.2 P3.2.1	Replaced: C3.1.1 and C3.1.2 replace Clause 3.2 C3.2.1
O3.1.3 augments Clause 3.2 P3.2.2	Remaining: None
O3.1.1	Height that is situated on a site to minimise amenity impacts to neighbouring properties, heritage places and the streetscape .
O3.1.2	Development that incorporates design measures to reduce the impact of height , bulk and scale in neighbouring properties and the streetscape .
O3.1.3	Design which is complimentary to existing developments.

Town Centre, Activity Corridor, Mixed Use and Transit Corridor			
Number of storeys	Concealed or skillion roof	Minimum lot boundary setback	
	Maximum building height	Maximum height of wall	Maximum total building height
2	8.1m	7.1m	10.1m
3	11.2m	10.2m	13.2m
4	14.3m	13.3m	16.3m
5	17.4m	16.4m	19.4m
6	20.5m	19.5m	22.5m
7	23.6m	22.6m	25.6m
8	26.7m	25.7m	28.7m

TABLE 9A

Residential			
Number of storeys	Concealed or skillion roof	Minimum lot boundary setback	
	Maximum building height	Maximum height of wall	Maximum total building height
1	4m	3m	6m
2	7m	6m	9m
3	10m	9m	12m
4	13m	12m	15m
5	17m	16m	18m

TABLE 9B

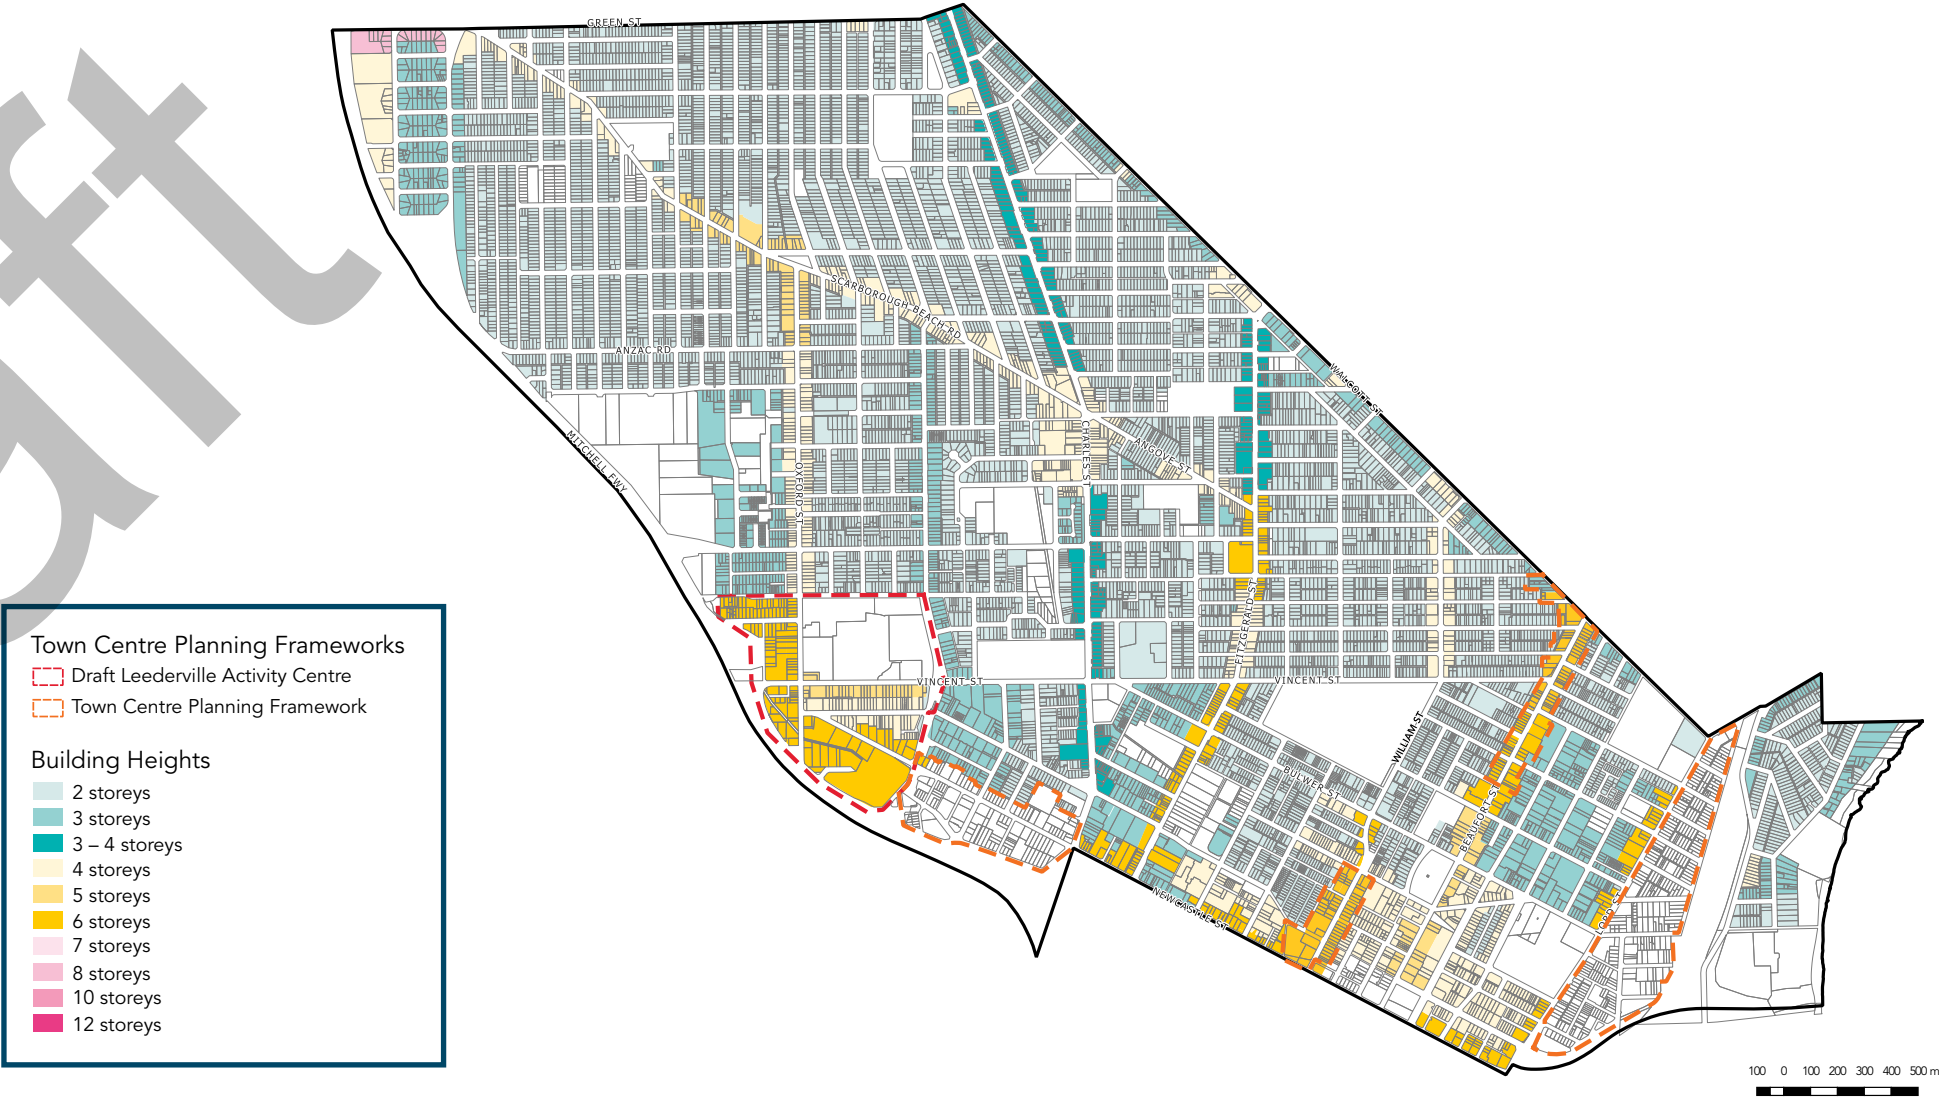


FIGURE 8


4 Street setbacks

4.1 Town Centre, Activity Corridor and Mixed Use			
Local Housing Objectives		Deemed to Comply	
O4.1.1 – O4.1.5 augment Clause 3.3 P3.3.3		Replaced: C1.1.1 replaces Clauses 3.3 C3.3.1 – C3.3.6 Remaining: None	
O4.1.1	Development which maximises natural light access, natural ventilation and, internal and external privacy.	WAPC approval required? No	WAPC approval date: N/A
O4.1.2	Setbacks that facilitate the provision of landscaping .	C4.1.1 Primary and secondary street setback is nil.	
O4.1.3	Street setbacks that facilitate the provision of useable open space , alfresco dining opportunities and landscaping which contributes to canopy coverage.		
O4.1.4	Development which activates and addresses rights of way.		
O4.1.5	Development which incorporates design elements that reduce the impact of building bulk.		

4.2 Transit Corridor			
Local Housing Objectives		Deemed to Comply	
O4.2.1 – O4.2.5 augment Clause 3.3 P3.3.3		Replaced: C4.2.1 and C1.2.2 replaced Clause 3.3 C3.3.1 and C3.3.2 (i) Remaining: Clause 3.3 C3.3.2 (ii) – C3.3.6	
O4.2.1	Development which maximises natural light access, natural ventilation, internal and external privacy.	WAPC approval required? No	WAPC approval date: N/A
O4.2.2	Setbacks that facilitate the provision of deep soil areas and canopy coverage.	Setback of buildings C4.2.1 The primary and secondary street setback is as per Clause 3.3 of the R Codes Volume 1 Part C. C4.2.2 Primary and secondary street setback for the third storey and above must incorporate articulation and the use of varying colours and materials which minimise the bulk and scale of the building on the streetscape .	
O4.2.3	Development which activates and addresses rights of way .		
O4.2.4	Development which incorporates design elements that reduce the impact of building bulk.		
O4.2.5	Development which appropriately addresses rights of way to facilitate spaces which are welcoming and safe for residents and visitors.		

Local Housing Objectives		4.3 Residential										
		Deemed to Comply										
O4.3.1 – O4.3.2 augment Clause 3.3 P3.3.3		Replaced: C4.3.1 – C4.3.4 replaces Clause 3.3 C3.3.1 – C3.3.2 C4.3.5 and C4.3.6 replaces Clause 3.3 C3.3.4 C4.3.7 – C4.3.9 replace Clause 3.3 C3.3.5 Remaining: Clause 3.3 C3.3.3 and C3.3.6										
O4.3.1	Development which incorporates predominant features of the streetscape .	WAPC approval required? No	WAPC approval date: N/A									
O4.3.2	Development which clearly distinguishes all upper floors from lower storeys to clearly distinguish the parts of the dwelling .	Setback of buildings C4.3.1 Buildings should be set back from the street boundaries, including rights of way, in accordance with the table below.										
O4.3.4	Development which minimises the visual bulk of the buildings through articulation of larger wall lengths and the stepping back of upper storeys walls.	<table><tr><th>Street type</th><th>Walls of upper storeys</th><th>Balconies</th></tr><tr><td>Primary Street including right of way or laneway as Primary Street</td><td>Setback an additional 2.0m from the street boundary than the ground floor.</td><td>Setback an additional 1.0m from the street boundary than the ground floor.</td></tr><tr><td>Secondary Street</td><td>Setback an additional 1.5m from the street setback provided to the storey below.</td><td>No Additional Requirement</td></tr></table>		Street type	Walls of upper storeys	Balconies	Primary Street including right of way or laneway as Primary Street	Setback an additional 2.0m from the street boundary than the ground floor.	Setback an additional 1.0m from the street boundary than the ground floor.	Secondary Street	Setback an additional 1.5m from the street setback provided to the storey below.	No Additional Requirement
Street type	Walls of upper storeys	Balconies										
Primary Street including right of way or laneway as Primary Street	Setback an additional 2.0m from the street boundary than the ground floor.	Setback an additional 1.0m from the street boundary than the ground floor.										
Secondary Street	Setback an additional 1.5m from the street setback provided to the storey below.	No Additional Requirement										
		Notes: 1. For measuring the ground floor primary street setback , the measurement should be taken from the street boundary to the closest portion of wall to the dwelling . Elements identified in Clause 4.3.2 (c) should be excluded.										

4.3 Residential																												
Local Housing Objectives		Deemed to Comply																										
O4.3.1 – O4.3.2 augment Clause 3.3 P3.3.3		Replaced: C4.3.1 – C4.3.4 replaces Clause 3.3 C3.3.1 – C3.3.2 C4.3.5 and C4.3.6 replaces Clause 3.3 C3.3.4 C4.3.7 – C4.3.9 replace Clause 3.3 C3.3.5 Remaining: Clause 3.3 C3.3.3 and C3.3.6																										
O4.3.1	Development which incorporates predominant features of the streetscape .	WAPC approval required? No		WAPC approval date: N/A																								
O4.3.2	Development which clearly distinguishes all upper floors from lower storeys to clearly distinguish the parts of the dwelling .	C4.3.1 Buildings to be set back from the street boundaries, including rights of way, in accordance with the table below.																										
O4.3.4	Development which minimises the visual bulk of the buildings through articulation of larger wall lengths and the stepping back of upper storeys walls.																											
		<table><tr><th rowspan="2">Street type</th><th colspan="4">Density Code</th></tr><tr><th>R20</th><th>R25</th><th>R30</th><th>R40</th></tr><tr><td>Primary street</td><td colspan="4">As established in clause 1.3.2</td></tr><tr><td>Secondary street</td><td>1.5m</td><td>1.5m</td><td>1.5m</td><td>1.0m</td></tr><tr><td>Right of way, laneway or communal street^a</td><td>1.0m</td><td>1.0m</td><td>1.0m</td><td>1.0m</td></tr></table>			Street type	Density Code				R20	R25	R30	R40	Primary street	As established in clause 1.3.2				Secondary street	1.5m	1.5m	1.5m	1.0m	Right of way, laneway or communal street ^a	1.0m	1.0m	1.0m	1.0m
Street type	Density Code																											
	R20	R25	R30	R40																								
Primary street	As established in clause 1.3.2																											
Secondary street	1.5m	1.5m	1.5m	1.0m																								
Right of way, laneway or communal street ^a	1.0m	1.0m	1.0m	1.0m																								
		Notes: a. Right of way , laneway or Communal Street setback includes where a right of way or laneway forms the principal frontage and primary street to the dwelling . b. Where road or right of way widening is required, setbacks should be calculated from the adjusted street boundary.																										
		C4.3.2 Buildings to be set back from the street boundary corresponding to the average of the setback of the five properties to each side of the proposed development that front the same street, as follows: a) The setback should be measured from the street boundary to the closest portion of the dwelling . b) Where multiple dwellings are located on one or more of the five properties to each side of the subject site, each development should be treated as one dwelling for the purposes of this calculation. c) For the purposes of measuring the primary street setback , the following buildings are not to be included: i. porches, verandahs, patios , carports , balconies and the like; and ii. Garages that are, unenclosed except where they abut a dwelling and may have a door that is visually permeable. This includes garages that received approval as ‘ carports ’ under previous versions of the Residential Design Codes																										
		C4.3.3 In addition to Clause 4.3.1, development that is more than one storey in height should be set back in accordance with the table below.																										
		<table><tr><th>Street type</th><th>Walls of upper storeys</th><th>Balconies</th></tr><tr><td>Primary Street including right of way or laneway as Primary Street</td><td>Setback an additional 2.0m from the street boundary than the ground floor.</td><td>Setback an additional 1.0m from the street boundary than the ground floor.</td></tr><tr><td>Secondary Street</td><td>Setback an additional 1.5m from the street setback provided to the storey below.</td><td>No Additional Requirement</td></tr></table>			Street type	Walls of upper storeys	Balconies	Primary Street including right of way or laneway as Primary Street	Setback an additional 2.0m from the street boundary than the ground floor.	Setback an additional 1.0m from the street boundary than the ground floor.	Secondary Street	Setback an additional 1.5m from the street setback provided to the storey below.	No Additional Requirement															
Street type	Walls of upper storeys	Balconies																										
Primary Street including right of way or laneway as Primary Street	Setback an additional 2.0m from the street boundary than the ground floor.	Setback an additional 1.0m from the street boundary than the ground floor.																										
Secondary Street	Setback an additional 1.5m from the street setback provided to the storey below.	No Additional Requirement																										
		Notes: 1. For measuring the ground floor primary street setback , the measurement should be taken from the street boundary to the closest portion of wall to the dwelling . Elements identified in Clause 4.3.2 (c) should be excluded.																										
		C4.3.4 An unenclosed porch , verandah or the equivalent may (subject to the Building Codes of Australia) project into the primary street setback area to a maximum of half the required primary street setback area .																										
		Setback of garages and carports																										
		C4.3.5 Garages should be setback a minimum of 500mm behind the dwelling alignment (excluding any porch portico verandah or balcony or the like).																										
		C4.3.6 Garages and carports must match the existing dwellings predominant colour, scale and materials and must be complementary and subservient to the dwelling .																										
		C4.3.7 Carports should be setback in accordance with Clause C4.3.1 and C4.3.2 of this Policy. This setback may be reduced by up to 50 per cent provided that the area of any building encroaching into the setback area is compensated for by at least an equal area of open space that is located between the street setback line and a line drawn parallel to it at twice the setback distance (Figure 8).																										
		C4.3.8 Carports must provide an unobstructed view to major openings of the dwelling from the street. Gates or doors to carports are required to be visually permeable .																										
		C4.3.9 Carports should allow light and ventilation to the major openings of the dwelling .																										

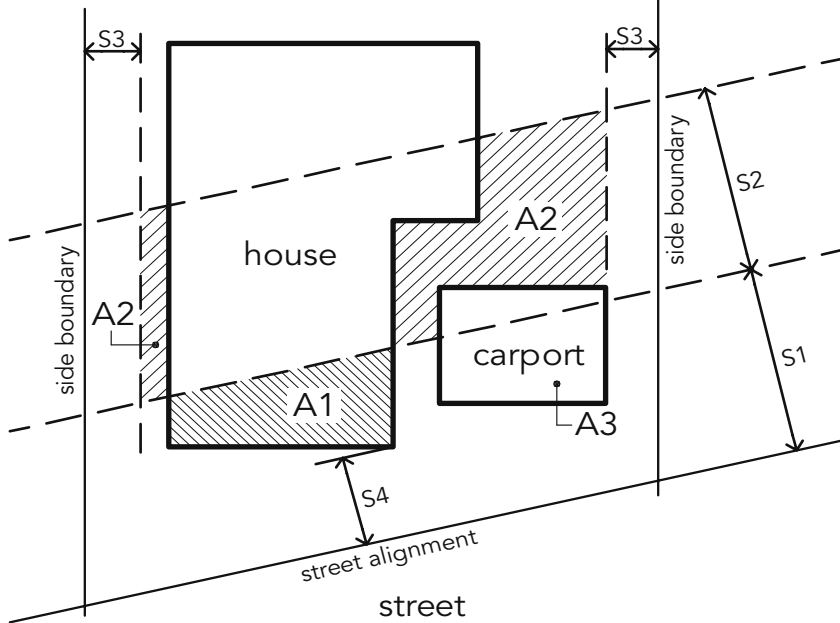

- A1 Area of building forward of primary street setback
- A2 Compensating open space behind primary street setback
- A3 The carport in S1 does not need to be compensated for in S2
- S1 Primary street setback distance (Table B)
- S2 Distance behind the primary street setback , equal to S1
- S3 Side boundary setback (Table 2a and 2b)
- S4 Maximum reduced primary street setback (half of S1)

FIGURE 9
Note: Carport to be considered as A1.

5 Streetscape

5.1 Transit Corridor	
Local Housing Objectives	Deemed to Comply
O5.1.1 Development which preserves and enhances the visual character of the existing streetscape by considering bulk, scale, setbacks , design, relationship between the private and public domain, and fencing styles.	Replaced: C5.1.1 and C5.1.2 replace Clause 3.6 C3.6.7 and C3.6.8 C5.1.3 replaces Clause 3.6 C3.6.8 and C3.6.9 C5.1.4 – C5.1.6 replace Clause 5.1.3 C3.6.7
	Remaining: None
	WAPC approval required? NoWAPC approval date: N/A
	Street walls and fences
	C5.1.1 Street walls, street fences and gates should be of a style and materials compatible with those of the development on site and/or walls, fences and gates of the immediate surrounding area excluding fibre cement.
C5.1.2 Street walls, fences and gates within the primary street setback area, including along the side boundaries, and front walls and fences to new dwelling s fronting a right of way or dedicated road to be as follows:	
1. Maximum height of 1.8m above the natural ground level; 2. Maximum height of piers with decorative capping to be 2m above the natural ground level; 3. Maximum height of solid portion of wall to be 1.2m above adjacent footpath level and should be visually permeable above 1.2m; 4. Posts and piers should have a maximum width 400mm and a maximum diameter of 500mm; and 5. The distance between piers should not be less than the height of the piers except where pedestrian gates are proposed.	
C5.1.3 Street walls, fences and gates to secondary streets , behind the primary street setback line , or walls, fences and gates to the primary streets where those streets are district distributor roads to be as follows:	
a. Solid portion of wall may increase to a maximum height of 1.8m above adjacent footpath level provided that the wall or fence has at least two significant appropriate design features (to the satisfaction of the City of Vincent) to reduce the visual impact – for example, significant open structures, recesses and/or planters facing the road at regular intervals and varying materials, finishes and/or colours. b. Maximum height of piers with decorative capping to be 2m above adjacent footpath level.	
C5.1.4 Exposed boundary walls visible to the street should incorporate the following design features:	
• indentations • varying heights • varying materials, colours and textures; or • public artwork.	
C5.1.5 Any proposed vehicular or pedestrian entry gates should be visually permeable .	
C5.1.6 Walls and fences on the side boundaries, only within the primary street setback area , constructed from metal sheeting are permitted provided they meet all other requirements relating to height , provide adequate sight lines and are not a side boundary fence facing a secondary street .	

5.2 Residential	
Local Housing Objectives	Deemed to Comply
	Replaced: C5.2.1 augments Clause 3.6 C3.6.1 (i) C5.2.2 and C5.2.3 replace Clause 3.6 C3.6.5 C5.2.4 replaces Clause 3.6 C3.6.6 C5.2.5 – C5.1.7 replace Clause 3.6 C3.6.7 and C3.6.8 C8.1.8 replaces Clause 3.3 C3.6.8 and C3.6.9 Remaining: Clause 3.6 C3.6.1 – C3.6.4
O7.2.1	Front fences and walls which enable surveillance and enhance streetscape .
O7.2.2	Development which adds interest to the street and minimises blank facades.
	WAPC approval required? No WAPC approval date: N/A Addressing the street C5.2.1 The primary street elevation of the dwelling should address the street and should include the main entry (front door) to the dwelling. Sites which abut a right of way and do not designate another primary street should address the right of way as though it were its primary street for the purposes of this clause. C5.1.2 Garages which are 50 per cent or less than the width of the lot. C5.1.3 For lots less than 10m wide, garages which are a maximum of 4m wide. C5.2.4 The total width of any carport within the street setback area is not to exceed 50 per cent of the frontage (including strata lots) of the lot or six whichever is the lesser. Street walls and fences C5.2.5 Street walls, street fences and gates should be of a style and materials compatible with those of the development on site and/or walls, fences and gates of the immediate surrounding area excluding fibre cement. C5.2.6 Street walls, fences and gates within the primary street setback area, including along the side boundaries, and front walls and fences to new dwellings fronting a right of way or dedicated road to be as follows: 1. Maximum height of 1.8m above the natural ground level; 2. Maximum height of piers with decorative capping to be 2m above the natural ground level; 3. Maximum height of solid portion of wall to be 1.2m above adjacent footpath level and should be visually permeable above 1.2m; 4. Posts and piers should have a maximum width 400mm and a maximum diameter of 500mm; and 5. The distance between piers should not be less than the height of the piers except where pedestrian gates are proposed. C5.1.7 Walls, fences and gates on the side boundaries within the primary street setback area, constructed from metal sheeting are permitted provided they meet all other requirements relating to height, provide adequate sight lines and are not a side boundary fence facing a secondary street. C5.1.8 Street walls, fences and gates to secondary streets, behind the primary street setback line, or walls, fences and gates to the primary streets where those streets are district distributor roads to be as follows: a. Solid portion of wall may increase to a maximum height of 1.8m above adjacent footpath level provided that the wall or fence has at least two significant appropriate design features (to the satisfaction of the City of Vincent) to reduce the visual impact – for example, significant open structures, recesses and/or planters facing the road at regular intervals and varying materials, finishes and/or colours. b. Maximum height of piers with decorative capping to be 2m above adjacent footpath level.

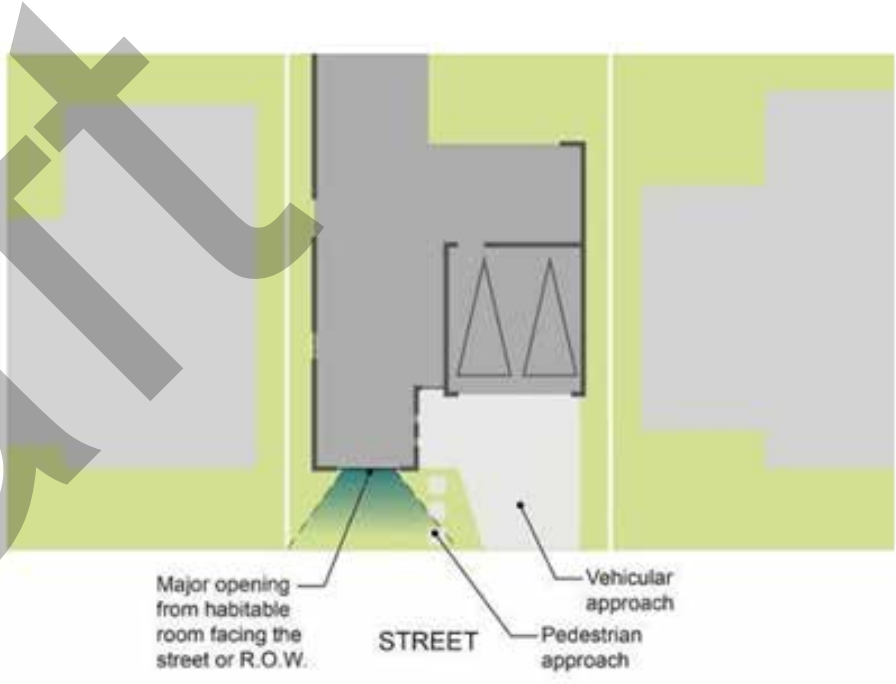


FIGURE 10

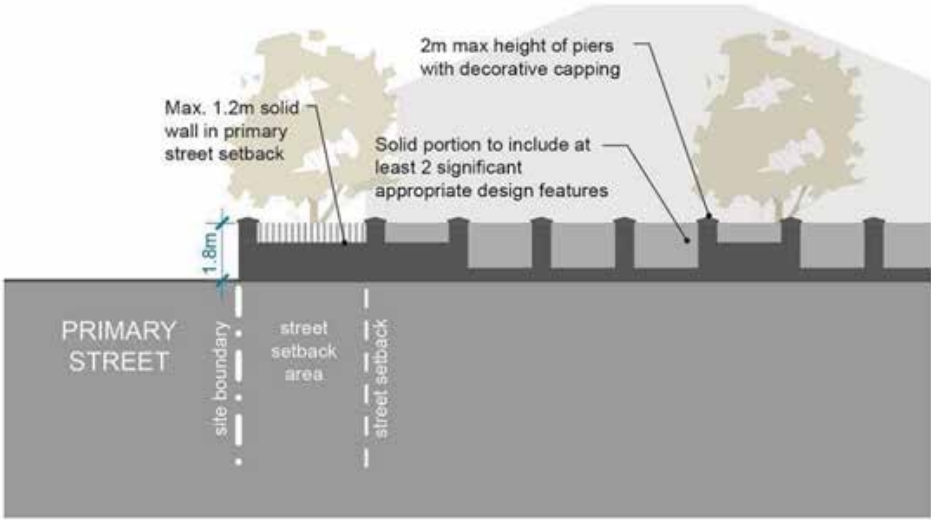


FIGURE 11

6 Access

6.1 Town Centre, Activity Corridor and Mixed Use	
Local Housing Objectives	

O6.1.1 and O11.1.2 augment Clause 3.7 P3.7.1
O6.1.3 – O6.1.5 augments Clause 3.7 P3.7.2

O6.1.1	Vehicle access to and from site should be safe, manageable and convenient.
O6.1.2	Pedestrian priority and safety should be ensured by minimising the number, location and design of vehicle crossovers .
O6.1.3	Minimise breaks in the street wall to maximise active frontages .
O6.1.4	Service areas, loading bays and vehicle entrances should gain access from the secondary street or right of way where ever possible.
O6.1.5	Maximise the retention of existing mature vegetation through the location and design of vehicle access.

6.2 Residential	
Local Housing Objectives	Deemed to Comply

O1.1.1	augments Clause 3.7 P3.7.1.	Replaced: C6.2.1 – C6.2.3 replace Clause 3.7 C3.7.7 Remaining: Clause 3.7 C3.7.1 – 3.7.6 and C3.7.8 – C3.7.13
---------------	-----------------------------	--

O6.2.1	Development which allows safe vehicle movement between the private and public domain.	WAPC approval required? No	WAPC approval date: N/A
Sightlines			
C6.2.1	Except where required for manoeuvring of vehicles, structures within visual truncation areas as required in Table 10 are; i. Provide a Clear Sight Line above 0.75m from the natural ground level . ii. No greater than 0.35m x 0.35m in dimension, or 0.5m in diameter.		
C6.2.2	Notwithstanding C6.2.1, the following structures may be in visual truncation areas: - One pier/pillar with a maximum width and depth of 400mm and 1.8m height above natural ground level, or 2.0m tall to the top of decorative capping above the natural ground level. - If a gate is proposed across a vehicle access point where a driveway meets a public street and where two streets intersect, the gate must provide: - When closed: a minimum of 50 per cent unobstructed view. - When open: a clear sight line from 0.75m above the natural grund level within 1.5m of where the vehicle access way joins the street.		
C6.2.3	No structures are located within a 1m x 1m truncation where a right of way intersects another right of way or driveway .		

Road A	Road B	Sightline Area	Exemption
Vehicle Access Point or Driveway	Right of way or Laneway	1.0m x 1.0m	No sightline required for: 'Entry only' vehicle access points or driveways; - The entry side of two-way vehicle access points that are 6.0m or greater in width, and signage and line markings are provided.
Vehicle Access Point or Driveway	Local Access Road	1.5m x 1.5m	
Right of way	Local access road or right of way	2m x 2m	Otherwise specified in the Metropolitan Region Scheme (MRS)
Local road (includes Local Distributor Road)	Local road (includes Local Distributor Road) or District/Primary Distributor road	3m x 3m	Otherwise specified in the MRS
District/Primary Distributor road	District/Primary Distributor road	6m x 6m	Otherwise specified in the MRS

TABLE 10

7 Utilities

5.1 Transit Corridor	
Local Housing Objectives	Deemed to Comply

		C7.1.1 augments Clause 2.5 C2.5.2	
O7.1.1	Solar panels are located as to not be directly visible from adjoining properties	WAPC approval required? No	WAPC approval date: N/A

C7.1.1	For single houses and grouped dwellings , air conditioning fixtures should be placed at the rear of the ground floor. The highest point of the air conditioning fixture should be a maximum 1.8m above natural ground level or below the existing fence line, whichever is lesser.
---------------	---

SECTION 3
HIGH-DENSITY DEVELOPMENT (R
CODES VOLUME 2)

1 Building height

1.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential	
Replace	Remain
A1.1.1 and A1.1.2 replace Clause 2.2 A2.2.1	
WAPC approval required? No	WAPC approval date: N/A
Acceptable outcomes	
A1.1.1	Development that is consistent with the building heights provided in Table 11a , Table 11b and Figure 12 .
A1.1.2	External fixtures may extend beyond the maximum height in Table 11a and Table 11b where they are not visible from the street or neighbouring properties.

TABLE 11A

Town Centre, Activity Corridor, Mixed Use and Transit Corridor			
Number of storeys	Concealed or skillion roof	Minimum lot boundary setback	
	Maximum building height	Maximum height of wall	Maximum total building height
2	8.1m	7.1m	10.1m
3	11.2m	10.2m	13.2m
4	14.3m	13.3m	16.3m
5	17.4m	16.4m	19.4m
6	20.5m	19.5m	22.5m
7	23.6m	22.6m	25.6m
8	26.7m	25.7m	28.7m

TABLE 11B

Residential			
Number of storeys	Concealed or skillion roof	Minimum lot boundary setback	
	Maximum building height	Maximum height of wall	Maximum total building height
1	4m	3m	6m
2	7m	6m	9m
3	10m	9m	12m
4	13m	12m	15m
5	17m	16m	18m

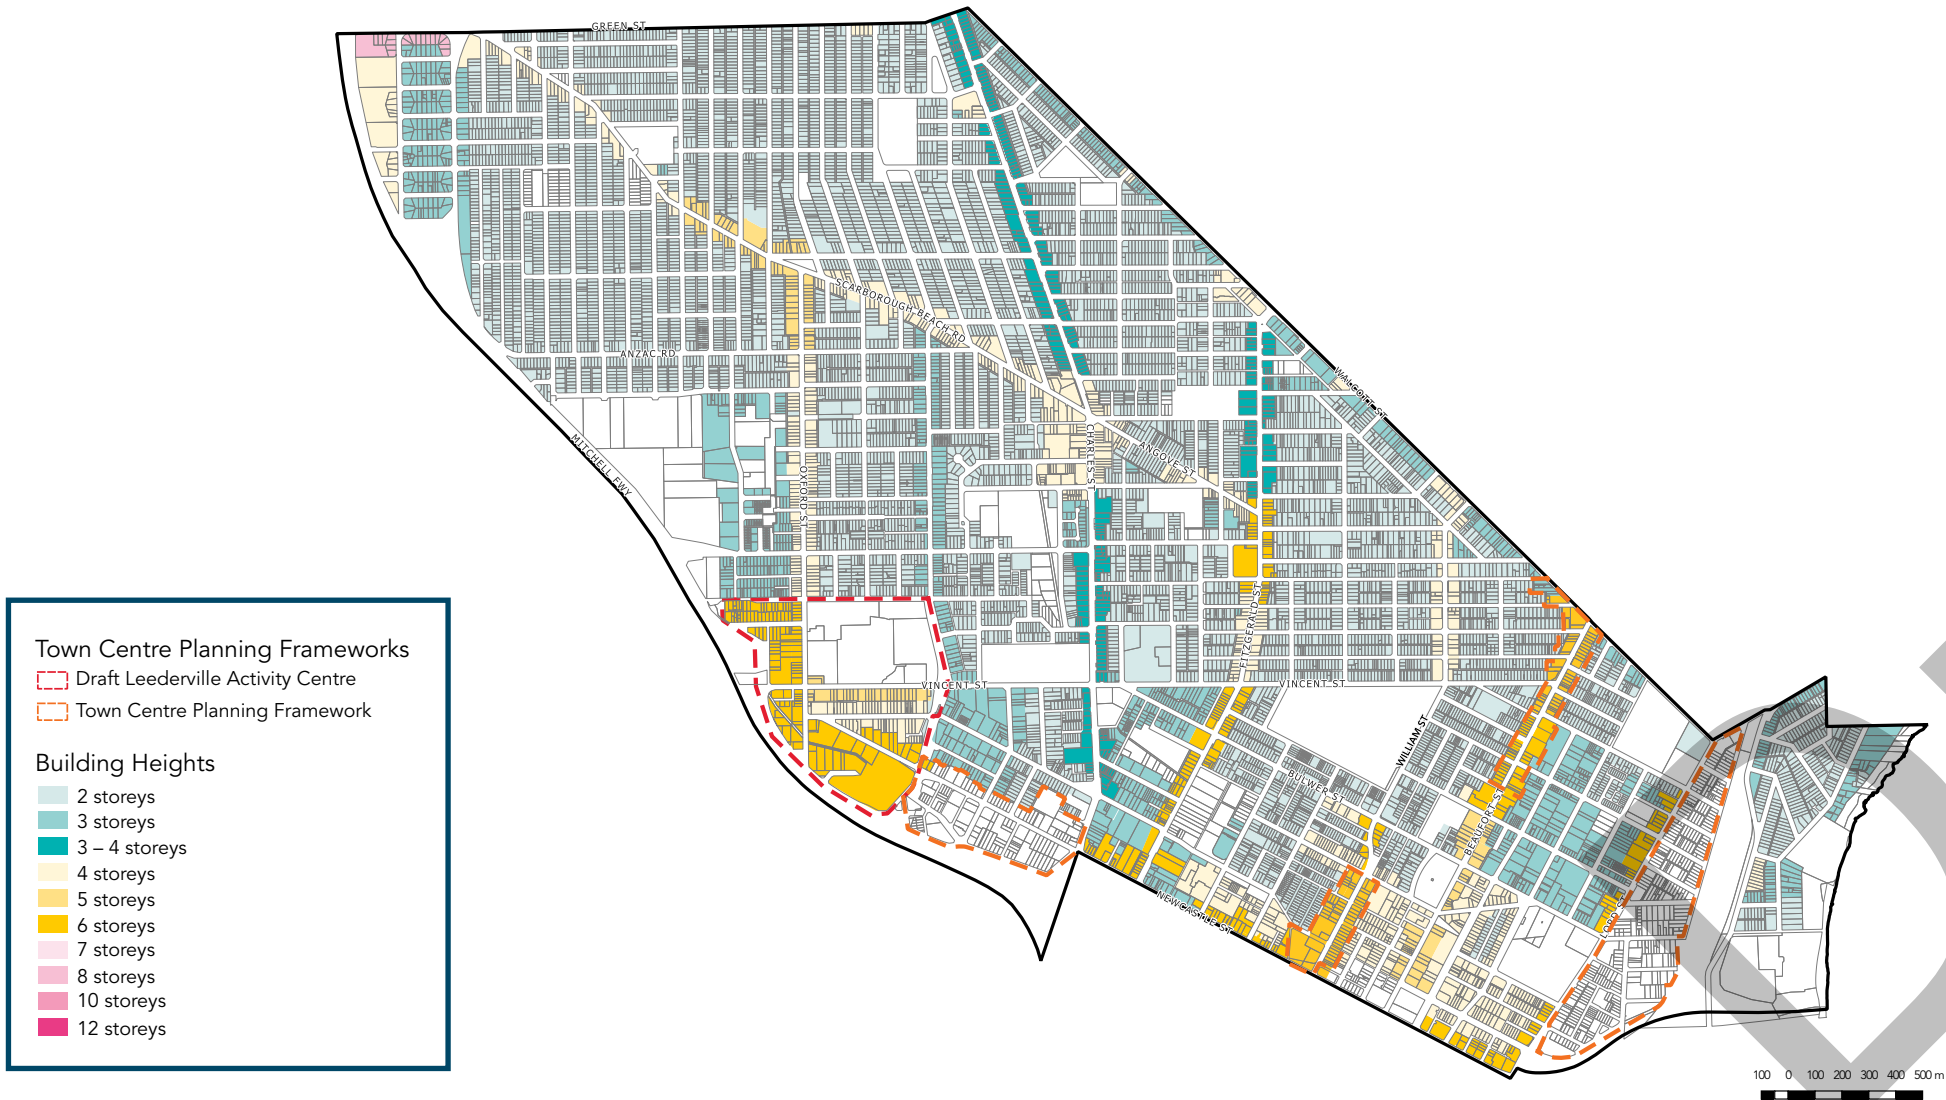


FIGURE 12

2 Street setbacks

2.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential	
Replace	Remain
A1.2.1 replaces Clause 2.3 A2.3.1	
WAPC approval required? No	WAPC approval date: N/A
Acceptable outcomes	
A1.2.1 Primary and secondary street setback is nil.	

2.2 Transit Corridor	
Replace	Remain
A2.2.1 and A2.2.2 replace Clause 2.3 A2.3.1	
WAPC approval required? No	WAPC approval date: N/A
Acceptable outcomes	
A2.2.1 Development complies with the street setback set out in Table 2.1 of the R Codes Volume 2.	
A2.2.2 Primary and secondary street setback for the third storey and above must incorporate articulation and the use of varying colours and materials which minimise the bulk and scale of the building on the streetscape.	

2.3 Residential	
Replace	Remain
A2.3.1 – A2.3.6 replace Clause 2.3 A2.3.1	
WAPC approval required? No	WAPC approval date: N/A
Acceptable outcomes	
A2.3.1 The primary street setback should be calculated by averaging the setback of the five dwellings adjoining properties, either side of the proposed development.	
A2.3.2 For the purpose of averaging, the primary street setback should be measured from the street alignment to the nearest wall of the dwelling excluding porches, verandahs, carports and balconies.	
A2.3.3 Walls on upper floors setback a minimum of 2m behind the ground floor predominant building line (excluding any porch or verandah), as determined by the City.	
A2.3.4 Balconies on upper floors setback a minimum of 1 metre behind the ground floor predominant building line (excluding any porch or verandah), as determined by the City.	
A2.3.5 The ground floor secondary street setback should be as per the R Codes.	
A2.3.6 Secondary street setback for upper floors should be 1.5m behind each portion of the ground floor setback.	



3 Side and rear setbacks

3.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential	
Replace	Remain
A3.1.1 – A3.1.2 Clause 2.4 A2.4.1	Clause 2.4 A2.4.2 remains and applies
WAPC approval required? No	WAPC approval date: N/A
Acceptable outcomes	

Lot boundaries
A3.1.1 Side and rear **setbacks** in accordance with **Tables 12a, 12b** and **12c**.

Development Adjoining Rights of Way
A3.1.2 Where development adjoins a **right of way** the **setback** should be measured from the midpoint of the **right of way**.
A3.1.3 Development must address adjoining rights of way by providing **passive surveillance** and openings to the **right of way**.

TABLE 12A

TABLE 12A		Subject Property									
			R20	R30	R40	R50	R60	R80	R100+	R – AC3	No R Code
Neighbouring Property	Residential Built Form Area	R20	A	A	A	C	C	C	C	C	C
		R30	A	A	A	B	C	C	C	C	C
		R40	A	A	A	B	B	C	C	C	C
		R50	A	A	A	A	B	B	C	C	C
		R60	A	A	A	A	A	B	B	B	B
		R80	A	A	A	A	A	D	D	D	D
		R100+	A	A	A	A	A	D	D	D	D
		No R Code	A	A	A	A	A	D	D	D	D
Non-Residential Built Form Area		E	E	E	E	E	F	F	F	F	

TABLE 12C

Wall length (m)														
	9 or less	10	11	12	13	14	15	16	17	18	19	20	25	Over 25
Wall height (m)														
3.5 or less	1	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
4	1.1	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.6	1.6	1.6	1.7	1.7	1.8
4.5	1.1	1.5	1.5	1.5	1.5	1.5	1.6	1.7	1.7	1.7	1.7	1.7	1.8	2.0
5	1.1	1.5	1.5	1.5	1.5	1.6	1.7	1.8	1.8	1.8	1.8	1.9	2.0	2.3
5.5	1.2	1.5	1.5	1.5	1.6	1.7	1.8	1.9	1.9	2.0	2.0	2.1	2.3	2.5
6	1.2	1.5	1.5	1.5	1.6	1.8	1.9	2.0	2.0	2.1	2.1	2.2	2.4	2.8
6.5	1.2	1.5	1.5	1.6	1.7	1.9	2.0	2.1	2.1	2.2	2.2	2.3	2.7	3.0
7	1.2	1.5	1.5	1.6	1.8	2.0	2.1	2.2	2.2	2.3	2.4	2.5	2.8	3.3
7.5	1.3	1.5	1.6	1.7	1.9	2.1	2.2	2.3	2.3	2.4	2.5	2.6	3.0	3.5
8	1.3	1.5	1.6	1.7	1.9	2.1	2.2	2.4	2.4	2.5	2.6	2.7	3.1	3.8
8.5	1.4	1.6	1.7	1.8	2.0	2.2	2.3	2.5	2.6	2.7	2.8	2.9	3.3	4.1
9	1.4	1.7	1.7	1.8	2.0	2.3	2.4	2.6	2.7	2.8	2.9	3.0	3.6	4.3
9.5	1.4	1.7	1.8	1.9	2.1	2.4	2.5	2.7	2.8	2.9	3.0	3.2	3.8	4.6
10	1.5	1.8	1.9	2.0	2.2	2.4	2.6	2.8	2.9	3.0	3.1	3.3	4.0	4.8

TABLE 12B

	Setback for ground floor, second storey and third storey	Setback for the fourth storey and above
A	Table 1.3c	Table 1.3c
B	4.5m	6.5m
C	6.5m	12.5
D	R Codes Volume 2 Table 2.1	R Codes Volume 2 Table 2.1
E	Nil	Table 1.3c
F	Nil	R Codes Volume 2 Table 2.1

4 Tree canopy and deep soil areas

4.1 Town Centre, Activity Corridor and Mixed Use	
Replace	Remain
A4.1.1 replaces Clause 3.3 A3.3.4 A4.1.2 replaces Clause 3.3 A3.3.5	Clause 3.3 A3.3.1 – A3.3.3, A3.3.6 and A3.3.7 remain and apply
WAPC approval required? Yes	WAPC approval date: N/A
Acceptable outcomes	
A4.1.1	Deep soil areas are provided in accordance with Table 10 . Deep soil areas should be co-located with existing trees for retention and/or adjoining trees, or alternatively provided in a location that is conducive to tree growth and suitable for communal open space .
A4.1.2	Landscaping includes existing and new trees with shade producing canopies in accordance with Tables 13 and 14 .

4.2 Transit Corridor and Residential	
Replace	Remain
A4.2.1 and A4.2.2 replace Clause 3.3 A3.3.4 A4.2.3 replaces A3.3.5	Clause 3.3 A3.3.1 – A3.3.3, A3.3.6 and A3.3.7 remain and apply
Acceptable outcomes	
A4.2.1	Deep soil areas are provided in accordance with Table 14 . Deep soil areas should be co-located with existing trees for retention and/or adjoining trees, or alternatively provided in a location that is conducive to tree growth and suitable for communal open space .
A4.2.2	A minimum of 50 per cent of the front setback should be provided as soft landscaping .
A4.2.3	Landscaping includes existing and new trees with shade producing canopies in accordance with Tables 13 and 14 .

TABLE 13

Site area	Minimum deep soil area	Minimum requirement for trees
Less than 700m²		1 medium tree and 2 small trees
700 – 1000m²	15% OR 10% if existing tree(s) retained on site	2 medium trees and 1 small tree OR 1 large tree and 12 small trees
>1000m²	(% of site area)	2 mediums trees and 1 small tree OR 1 large tree and 2 small trees PLUS 1 large tree and 1 medium tree per 400m² in excess of 1000m² or part thereof

Tree size	Indicative canopy diameter at maturity	Normal height at maturity	Required DSA per tree	Recommended minimum DSA width	Minimum DSA width where additional rootable soil zone (RSZ) width provided¹ (min 1m depth)	Indicative pot size at planting
Small	2 – 6m	3 – 8m	9m²	2m	1m (DSA) + 1m (RSZ)	100L
Medium	6 – 9m	8 – 12m	36m²	3m	2m (DSA) + 1m (RSZ)	200L
Large	>9m	>12m	64m²	6m	4.5m (DSA) + 1.5m (RSZ)	500L

¹Rootable areas are for the purposes of determining minimum width only and do not have the effect of reducing the required DSA.

TABLE 14

5 Pedestrian access and entries

6.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential	
Additional	Remain
A4.1.1 – A4.1.6 apply in addition to Clause 6.1 A3.7.1 – A3.7.6	Clause 6.1 A3.7.1 – A3.7.6 remain and apply
WAPC approval required? No	WAPC approval date: N/A
Acceptable outcomes	

- A5.1.1**
- Pedestrian access which is identifiable from the street and visitor car parking areas and other public areas.
- A5.1.2**
- Access for pedestrians which directly fronts the **primary street**.
- A5.1.3**
- Developments should distinguish residential entries from retail and other commercial entries.
- A5.1.4**
- Internal ground floor level to be at grade.
- A5.1.5**
- Design of balustrades to be integrated into the design of the development.
- A5.1.6**
- Ramps are not to exceed 50 per cent of the **active frontage**.

6 Vehicle access

7.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential	
Additional and replace	Remain
A6.1.1 – A6.1.5 apply in addition to Clause 2.8 A3.8.1 – A3.8.6. A6.1.11 and A6.1.13 replace A3.8.7	Clause 3.8 A3.8.1 – A3.8.7 remain and apply
WAPC approval required? No	WAPC approval date: N/A
Acceptable outcomes	
A6.1.1	Service areas and vehicular access should be: a. Taken from the rear laneway or secondary street in the first instances. b. Collocated where taken from the primary street to maximise the width of active frontages
A6.1.2	Access to on-site car parking spaces to be provided: - Where available, from a right of way available for lawful use to access the relevant lot and which is adequately paved and drained from the property boundary to a dedicated road; - From a secondary street where no right of way exists. - From the primary street frontage where no secondary street or right-of way exists.
A6.1.3	Access to a right of way is required to be trafficable to the nearest dedicated road . The cost to upgrade a right of way to make it trafficable should be borne by the applicant.
A6.1.4	Where vehicular access is provided from a street, all vehicles are required to enter and exit the site in forward gear.
A6.1.5	Roller shutters, doors and screens should be visually permeable .
A6.1.6	Onsite parking for a development should be located beneath or at the rear of buildings .
A6.1.7	In a mixed-use development, car bays should be clearly signposted differentiating between the residential car bays and the commercial car bays.
A6.1.8	Where on-site parking provided for customer/client use is not directly visible from the adjacent street, adequate signage should be provided to promote public knowledge of and direction to the car park. This signage should comply with the requirements of the City's Local Planning Policy: Signs and Advertising.
A6.1.9	Existing trees must not be removed to provide for vehicle access.
A6.1.10	Each lot should provide a maximum of one crossover.
A6.1.11	The maximum width of a single crossover is 3m. The maximum width of a double crossover is 5m.
A6.1.12	Except where required for manoeuvring of vehicles, structures within visual truncation areas as required in Table 15 are: i. Provide a Clear sight line above 0.75m from the natural ground level . ii. No greater than 0.35m x 0.35m in dimension, or 0.5m in diameter.
A6.1.13	No structures are located within a 1m x 1m truncation where a right of way intersects another right of way or driveway .

TABLE 15

Road A	Road B	Sightline Area	Exemption
Vehicle Access Point or Driveway	Right of way or Laneway	1.0m x 1.0m	No sightline required for: 'Entry only' vehicle access points or driveways; - The entry side of two-way vehicle access points that are 6.0m or greater in width, and signage and line markings are provided.
Vehicle Access Point or Driveway	Local Access Road	1.5m x 1.5m	
Right of way	Local access road or right of way	2m x 2m	Otherwise specified in the Metropolitan Region Scheme (MRS)
Local road (includes Local Distributor Road)	Local road (includes Local Distributor Road) or District/Primary Distributor road	3m x 3m	Otherwise specified in the MRS
District/Primary Distributor road	District/Primary Distributor road	6m x 6m	Otherwise specified in the MRS

7 Facade design

8.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential	
Additional	Remain
A7.1.1 – A7.1.12 are in addition to Clause 4.10 A4.10.1	Clause 4.10 A4.10.1 – A1.01.6 remain and apply
WAPC approval required? No	WAPC approval date: N/A
Acceptable outcomes	
A7.1.1	Commercial Development which fronts the public realm should provide active frontages including glazing, openings and operable windows to ensure activity, interaction and surveillance of the street.
A7.1.2	Commercial Ground floor spaces should have a maximum width of 9m and a finished floor level to finished ceiling level height of a minimum of 3.5m.
A7.1.3	Development should identify key design elements in the local area and streetscape through an Urban Design Study and integrate and acknowledge these design elements where possible whilst avoiding the use of faux materials.
A7.1.4	Development which incorporates the design elements of the predominant streetscape character of the urban design study area outlined in Appendix 2 .
A7.1.5	Commercial Building facades visible from the public realm should: • Incorporate a variety of materials, colours, textures and depths. • Not present a blank, monotonous, repetitious or dominant building treatment. • Incorporate architectural or functional elements integrated into the façade, rather than cosmetic or superficial attachments to the building. • Incorporate vertical articulation by using tall and narrow facade treatments. • Incorporate articulation such as doorways, windows, seating ledges, sills, stall risers and other detailing. • Minimise use of shouldow framings systems and thin wall/glazing systems. • Integrate fire boosters, mail boxes and external fixtures into the building design or screen them so they appear as part of the facade. • Integrate signage into the design and articulation on the ground floor.
A7.1.6	Where provided, doorways should have a depth between 500mm and 1.5m to clearly articulate entrances to commercial buildings and tenancies.
A7.1.7	Where provided, windows, seating ledges, sills, stall risers and other detailing should have a minimum depth of 300mm.
A7.1.8	Where provided, stall risers should be a minimum height of 450mm.
A7.1.9	Commercial Ground floor glazing and/or tinting should have a minimum of 70 per cent visible light transmission to provide unobscured visibility.
A7.1.10	Security measures should be: • Located and installed internally behind the glazing line or recessed between elements in the façade such as columns or doorway recesses. • Transparent and visually permeable to allow views inside the building and enable internal light sources to be seen from the street.
A7.1.11	Commercial Development should provide a protective continuous awning over the pedestrian footpath, which should: • Be minimum height of 3.5m and a maximum height of 4m from finished floor level to the underside of the awning to accommodate under awning signage. • Be setback a minimum of 600mm from the face of kerb. • Respond to any existing and/or proposed verge trees. • Respond to the height, depth and form of existing awnings on the subject and adjoining buildings. • Respond to the slope of the site. • Integrated with the design of the facade.
A7.1.12	Verandahs and collonades are only permitted where they are constructed wholly within the lot boundaries of development site.

8 Roof design

9.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential	
Additional	Remain
A9.1.1 and A9.1.2 are in addition to Clause 4.11 A4.11.1 – A.4.11.3	Clause 4.11 A4.11.1 – A.4.11.3 remain and apply
WAPC approval required? No	WAPC approval date: N/A
Acceptable outcomes	
A8.1.1	Flat roof structures that are not visible from the street or adjacent properties should have a maximum solar absorptance rating of 0.4.
A8.1.2	Pitched roof structures or roof structures that are visible from the street or adjacent properties should have a maximum solar absorptance rating of 0.5, unless a suitable alternative is identified in the Urban Design Study.

SECTION 4

NON-RESIDENTIAL DEVELOPMENT

1 Building height

1.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential			
Objectives		Standards	
O1.1.1	Height that is situated on a site to minimise amenity impacts to neighbouring properties and the streetscape .	C1.1.1	Development that is consistent with the building heights provided in Table 16a , Table 16b and Figure 13 .
O1.1.2	Development that incorporates design measures to reduce the impact of height , bulk and scale on neighbouring properties and the streetscape .	C1.1.2	External fixtures may extend beyond the maximum height in Table 16a and Table 16b where they are not visible from the street or neighbouring properties.
O1.1.4	Design which minimises overlooking and overshadowing where it impacts residential development.		
O1.1.5	The height of development responds to the desired future scale and character of the street and local area, including existing buildings that are unlikely to change.		
O1.1.6	The height of buildings within a development responds to changes in topography.		
O1.1.7	Development incorporates articulated roof design.		
O1.1.8	The height of development recognises the need for daylight and solar access to adjoining and nearby residential development.		

TABLE 16A

Town Centre, Activity Corridor, Mixed Use and Transit Corridor			
Number of storeys	Concealed or skillion roof	Minimum lot boundary setback	
	Maximum building height	Maximum height of wall	Maximum total building height
2	8.1m	7.1m	10.1m
3	11.2m	10.2m	13.2m
4	14.3m	13.3m	16.3m
5	17.4m	16.4m	19.4m
6	20.5m	19.5m	22.5m
7	23.6m	22.6m	25.6m
8	26.7m	25.7m	28.7m

TABLE 16B

Residential			
Number of storeys	Concealed or skillion roof	Minimum lot boundary setback	
	Maximum building height	Maximum height of wall	Maximum total building height
1	4m	3m	6m
2	7m	6m	9m
3	10m	9m	12m
4	13m	12m	15m
5	17m	16m	18m

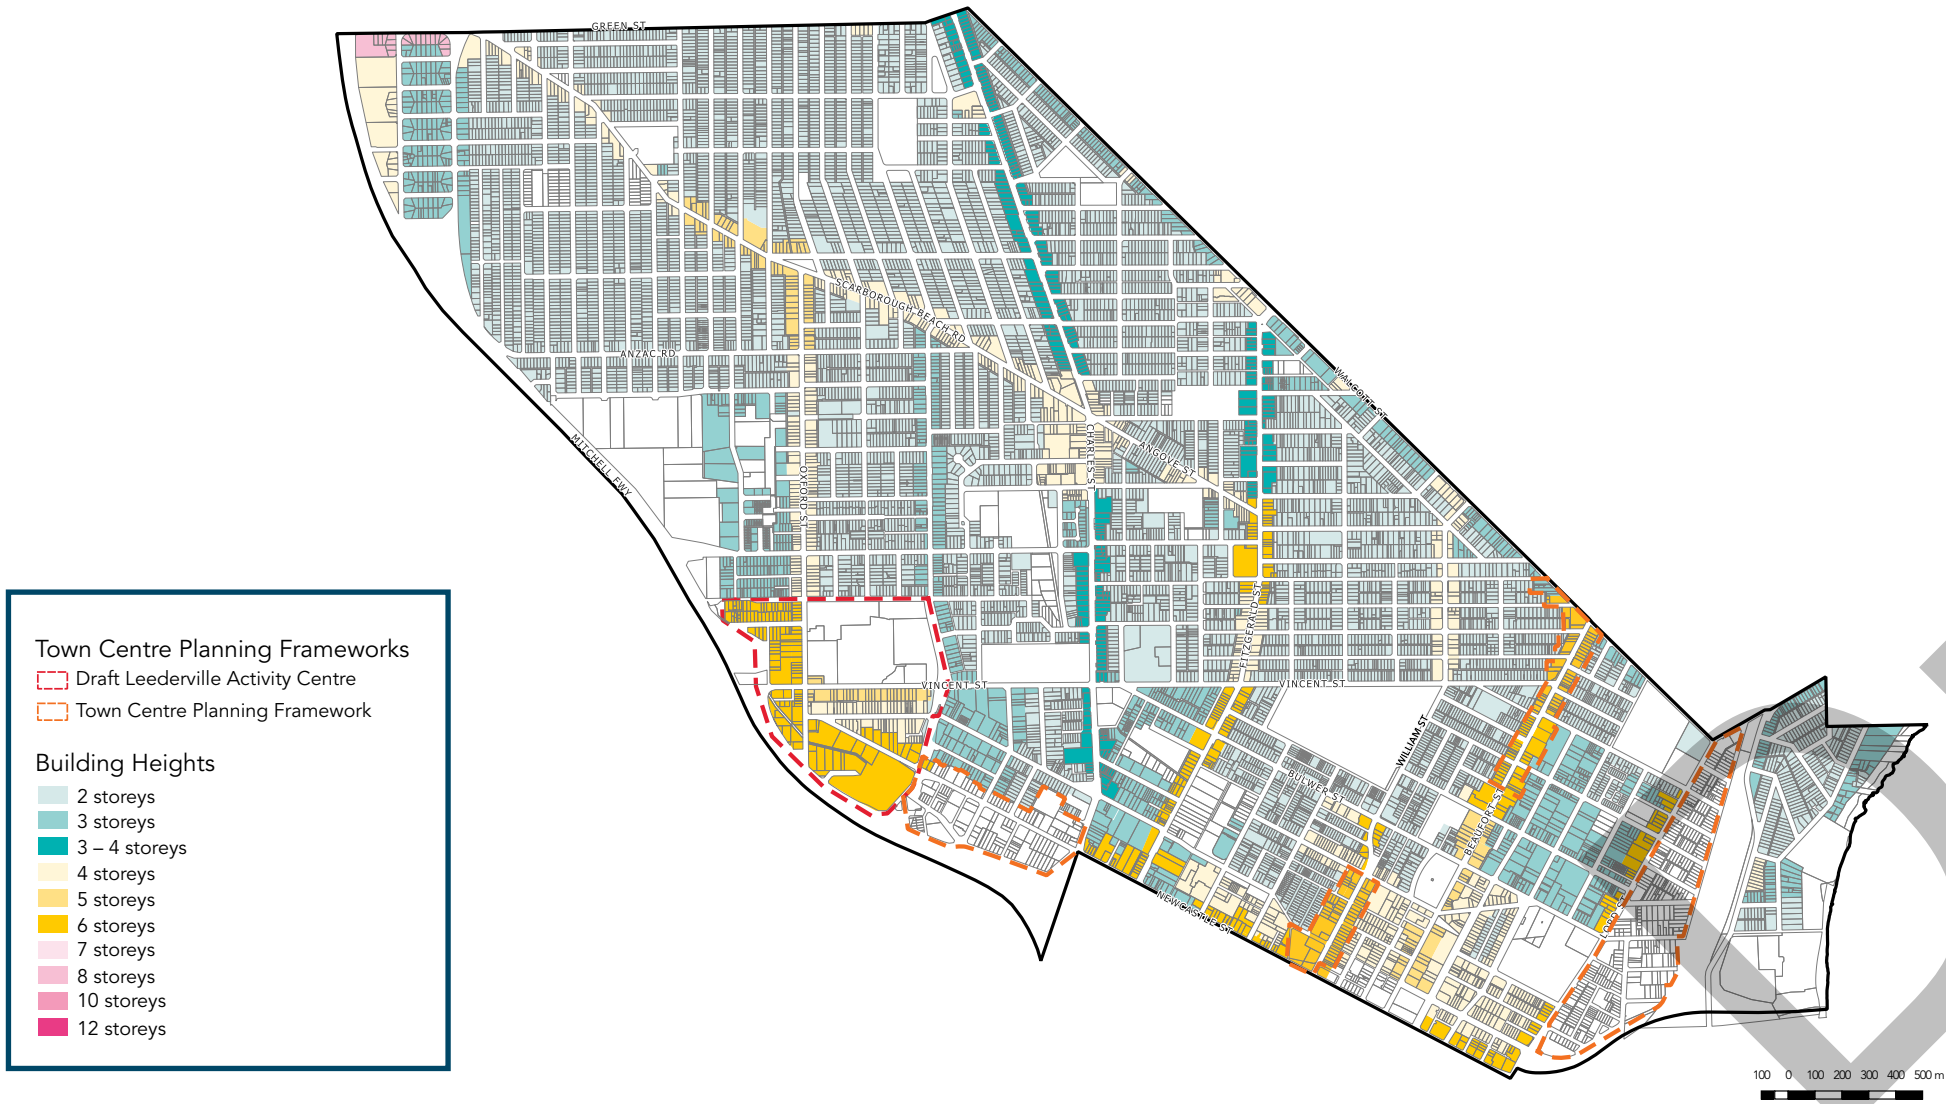


FIGURE 13

2 Street setbacks

2.1 Town Centre, Activity Corridor and Mixed Use		
Objectives		Standards
O2.1.1	Development which incorporates design elements that reduce the impact of building bulk.	C2.1.1 Primary and secondary street setback is nil.
O2.1.2	Development which maximises natural light access, natural ventilation and, internal and external privacy.	
O2.1.3	Development which activates and addresses rights of way.	
O2.1.4	Street setbacks that facilitate the provision of useable open space , alfresco dining opportunities and landscaping which contributes to canopy coverage.	
O2.1.5	The setback of the development from the street reinforces and/or complements the character of the street.	
O2.1.6	The setback of the development enables passive surveillance and outlook to the street.	
2.2 Transit Corridor		
Objectives		Standards
O2.2.1	Development which incorporates design elements that reduce the impact of building bulk.	C2.2.1 Primary and secondary street setback of 4m for development on sites coded R40.
O2.2.2	Development which maximises natural light access, natural ventilation and, internal and external privacy.	C2.2.2 Primary and secondary street setback of 4m for development on sites coded R50 and above and sites which do not have an R Code.
O2.2.3	Development which activates and addresses rights of way.	C2.2.3 Primary and secondary street setback for the third storey and above must incorporate articulation and the use of varying colours and materials which minimise the bulk and scale of the building on the streetscape .
O2.2.4	Street setbacks that facilitate the provision of useable open space , alfresco dining opportunities and landscaping which contributes to canopy coverage.	
O2.2.5	The setback of the development from the street reinforces and/or complements the character of the street.	
O2.2.6	The street setback provides a clear transition between the public and private realm.	
O2.2.7	The setback of the development enables passive surveillance and outlook to the street.	

2.3 Residential		
Objectives		Standards
O2.3.1	Development which incorporates design elements that reduce the impact of building bulk .	C2.3.1 The primary street setback should be calculated by averaging the setback of the five adjoining properties , either side of the proposed development.
O2.3.2	Development which maximises natural light access, natural ventilation and, internal and external privacy.	C2.3.2 For the purpose of averaging, the primary street setback should be measured from the street alignment to the nearest wall of the building excluding porches, verandahs, carports and balconies .
O2.3.3	Development which activates and addresses rights of way.	C2.3.3 Walls on upper floors setback a minimum of 2m behind the street setback .
O2.3.4	Street setbacks that facilitate the provision of useable open space , alfresco dining opportunities and landscaping which contributes to canopy coverage.	C2.3.4 Balconies on upper floors setback a minimum of 1m behind the ground floor setback .
O2.3.5	The setback of the development from the street reinforces and/or complements the character of the street.	C2.3.5 The secondary street setback should be 2m. Secondary street setbacks for upper floors should be 1.5m behind each portion of the ground floor setback for walls on upper floors.
O2.3.6	The street setback provides a clear transition between the public and private realm.	C2.3.6 Primary and secondary street setback for the third storey and above must incorporate articulation and the use of varying colours and materials which minimise the bulk and scale of the building on the streetscape .
O2.3.7	The setback of the development enables passive surveillance and outlook to the street.	
O2.3.8	Development which incorporates predominant features of the landscape.	
O2.3.9	Development which clearly distinguishes all upper floors from lower storeys to clearly distinguish the parts of the dwelling .	
O2.3.10	Development which minimises the visual bulk of the buildings through articulation of larger wall lengths and the stepping back of upper storeys walls.	

3 Side and rear setbacks

3.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential		
Objectives		Standards
O3.1.1	Development which incorporates design elements that reduce the impact of building bulk.	C3.1.1 Development complies with the side and rear setbacks set out in Tables 17a, 17b and 17c .
O3.1.2	Development which maximises natural light access, natural ventilation and, internal and external privacy.	C3.1.2 Where development adjoins a right of way the setback should be measured from the midpoint of the right of way .
O3.1.3	Setbacks that facilitate the provision of landscaping .	C3.1.3 Development must address adjoining rights of way by providing passive surveillance and openings to the right of way .
O3.1.4	Development which activates and addresses rights of way.	
O3.1.5	Building boundary setbacks provide for adequate separation between neighbouring properties.	
O3.1.6	Building boundary setbacks are address the existing streetscape pattern and the desired streetscape character.	
O3.1.7	The setback of development from side and rear boundaries enables retention of existing trees and provision of deep soil areas that reinforce the landscape character of the area, support tree canopy and assist with stormwater management.	
O3.1.8	The setback of development from side and rear boundaries provides a transition between sites with different land uses or intensity of development.	

TABLE 17A

		Subject Property								
			R20	R30	R40	R50	R60	R80	R100+	No R – Code
Neighbouring Property	Residential Built Form Area	R20	A	A	A	C	C	C	C	C
		R30	A	A	A	B	C	C	C	C
		R40	A	A	A	B	B	C	C	C
		R50	A	A	A	A	B	B	C	C
		R60	A	A	A	A	A	B	B	B
		R80	A	A	A	A	A	D	D	D
		R100+	A	A	A	A	A	D	D	D
	Non-Residential Built Form Area	No R – Code	A	A	A	A	A	D	D	D
			E	E	E	E	E	F	F	F

TABLE 17C

		Wall length (m)													
		9 or less	10	11	12	13	14	15	16	17	18	19	20	25	Over 25
Wall height (m)															
3.5 or less		1	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
4		1.1	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.6	1.6	1.6	1.7	1.7	1.8
4.5		1.1	1.5	1.5	1.5	1.5	1.5	1.6	1.7	1.7	1.7	1.7	1.7	1.8	2.0
5		1.1	1.5	1.5	1.5	1.5	1.6	1.7	1.8	1.8	1.8	1.8	1.9	2.0	2.3
5.5		1.2	1.5	1.5	1.5	1.6	1.7	1.8	1.9	1.9	2.0	2.0	2.1	2.3	2.5
6		1.2	1.5	1.5	1.5	1.6	1.8	1.9	2.0	2.0	2.1	2.1	2.2	2.4	2.8
6.5		1.2	1.5	1.5	1.6	1.7	1.9	2.0	2.1	2.1	2.2	2.2	2.3	2.7	3.0
7		1.2	1.5	1.5	1.6	1.8	2.0	2.1	2.2	2.2	2.3	2.4	2.5	2.8	3.3
7.5		1.3	1.5	1.6	1.7	1.9	2.1	2.2	2.3	2.3	2.4	2.5	2.6	3.0	3.5
8		1.3	1.5	1.6	1.7	1.9	2.1	2.2	2.4	2.4	2.5	2.6	2.7	3.1	3.8
8.5		1.4	1.6	1.7	1.8	2.0	2.2	2.3	2.5	2.6	2.7	2.8	2.9	3.3	4.1
9		1.4	1.7	1.7	1.8	2.0	2.3	2.4	2.6	2.7	2.8	2.9	3.0	3.6	4.3
9.5		1.4	1.7	1.8	1.9	2.1	2.4	2.5	2.7	2.8	2.9	3.0	3.2	3.8	4.6
10		1.5	1.8	1.9	2.0	2.2	2.4	2.6	2.8	2.9	3.0	3.1	3.3	4.0	4.8

TABLE 17B

	Setback for ground floor, second storey and third storey	Setback for the fourth storey and above
A	Table 1.3c	Table 1.3c
B	4.5m	6.5m
C	6.5m	12.5
D	R Codes Volume 2 Table 2.1	R Codes Volume 2 Table 2.1
E	Nil	Table 1.3c
F	Nil	R Codes Volume 2 Table 2.1

4 Orientation

4.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential			
Objectives		Standards	
O4.1.1	Building layouts respond to the streetscape , topography and site attributes while optimising solar and daylight access within the development.	C4.1.1	Buildings are oriented to maximise northern solar access.
O4.1.2	Building form and orientation minimises overshadowing of the habitable rooms, open space and solar collectors of neighbouring properties during mid-winter.	C4.1.2	Development should be designed such that the shadow cast at midday on 21 June onto any adjoining property does not exceed: adjoining properties coded R25 and lower – 25 per cent of the site area adjoining properties coded R30 – R40 – 35 per cent of the site area adjoining properties coded R50 – R60 – 50 per cent of the site area adjoining properties coded R80 or higher – nil requirements.
		C4.1.3	Where adjoining sites are coded R40 or less, buildings are oriented to maintain 4 hours per day solar access on 21 June for existing solar collectors on neighbouring sites.

5 Tree canopy and deep soil areas

5.1 Town Centre, Activity Corridor and Mixed Use			
Objectives		Standards	
O5.1.1	Landscaping should be designed to reduce the impact of development on adjoining residential zones and public spaces.	C5.1.1	Deep Soil Areas should be provided in accordance with Table 15 .
O5.1.2	Landscaping should provide increased urban air quality, tree and vegetation coverage and a sense of open space between buildings .	C5.1.2	The required Deep Soil Area may be reduced to 10 per cent where mature trees, which contribute to 30 per cent or more of the required canopy coverage, are retained.
O5.1.3	The provision of landscaping that will make an effective and demonstrated contribution to the City's green canopy to reduce the impact of the urban heat island effect.	C5.1.3	Planting Areas should be provided in accordance with Table 16.
O5.1.4	Development that prioritises the retention of mature and healthy trees.	C5.1.4	At least 80 per cent* of the lot boundary setback area at ground level should be provided as canopy coverage at maturity.
O5.1.5	Open air car parks should be appropriately landscaped to provide adequate shading and reduce the impact on adjoining properties .	C5.1.5	Evergreen tree species where landscaping is used to reduce the impact of building bulk.
O5.1.6	Development includes deep soil areas , or other infrastructure to support planting on structures, with sufficient area and volume to sustain healthy plant and tree growth.	C5.1.6	Deciduous tree species to the north and south of development to allow natural light penetration to the development and adjoining buildings .
		C5.1.7	Open air car parks, including access ways, should have a minimum of 60 per cent canopy coverage at maturity.
		C5.1.8	All open-air parking areas should be landscaped at a minimum rate of one tree per four car bays.
		C5.1.9	The perimeter of all open-air parking areas should be landscaped by a planting strip with a minimum dimension of 1.5m.
		C5.1.10	Existing trees should be retained where they are: - Healthy specimens with ongoing viability; and - Species not included on an applicable weed register.

5.2 Transit Corridor and Residential			
Objectives		Standards	
O5.2.1	Landscaping should be designed to reduce the impact of development on adjoining residential zones and public spaces.	C5.1.1	Deep Soil Areas should be provided in accordance with Table 18 .
O5.2.2	Landscaping should provide increased urban air quality, tree and vegetation coverage and a sense of open space between buildings .	C5.1.2	The required Deep Soil Area may be reduced to 10 per cent where mature trees, which contribute to 30 per cent or more of the required canopy coverage, are retained.
O5.2.3	The provision of landscaping that will make an effective and demonstrated contribution to the City's green canopy to reduce the impact of the urban heat island effect.	C5.1.3	A minimum of 50 per cent of the primary street setback should be provided as soft landscaping .
O5.2.4	Development that prioritises the retention of mature and healthy trees.	C5.1.4	Planting Areas should be provided in accordance with Table 19 .
O5.2.5	Open air car parks should be appropriately landscaped to provide adequate shading and reduce the impact on adjoining properties .	C5.1.5	At least 30 per cent of the site area is provided as canopy coverage at maturity.
O5.2.6	Development includes deep soil areas , or other infrastructure to support planting on structures, with sufficient area and volume to sustain healthy plant and tree growth.	C5.1.6	Open air car parks, including access ways, should have a minimum of 60 per cent canopy coverage at maturity.
		C5.1.7	All open-air parking areas should be landscaped at a minimum rate of one tree per four car bays.
		C5.1.8	The perimeter of all open-air parking areas should be landscaped by a planting strip with a minimum dimension of 1.5m.
		C5.1.9	Existing trees should be retained where they are: - Healthy specimens with ongoing viability; and - Species not included on an applicable weed register

Site area	Minimum are & minimum dimensions	Deep soil areas (minimum % of site)
<650m ²	1m ² 1m x1m	12%
650m ² – 1,500m ²	1m ² 1m x1m	12%
1,500m ²	1m ² 1m x1m	12%

TABLE 18

Site area	Minimum are & minimum dimensions	Planting area (minimum % of site)
<650m ²	1m ² 1m x1m	3%
650m ² – 1,500m ²	1m ² 1m x1m	3%
1,500m ²	1m ² 1m x1m	3%

TABLE 19

6 Visual privacy

7.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential	
Objectives	Standards
O6.1.1	The orientation and design of buildings , windows and balconies minimises direct overlooking of habitable rooms and private outdoor living areas of neighbouring properties.

7 Public domain interface

8.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential		
Objectives		Standards
O7.1.1	The transition between the private and public domain enhances the privacy and safety of residents.	C7.1.1 Car-parking is not located within the primary street setback ; and where car parking is located at ground level behind the street setback it is designed to integrate with landscaping and the building façade (where part of the building). C7.1.2 Upper level balconies and/or windows overlook the street and public domain areas. C7.1.3 Balustrading includes a mix of visually opaque and visually permeable materials to provide residents with privacy while maintaining casual surveillance of adjoining public domain areas. C7.1.4 Changes in level between the ground floor level of the building and the street level average less than 1m and do not exceed 1.2m. C7.1.5 Front fencing includes visually permeable materials above 1.2m and the average height of solid walls or fences to the street does not exceed 1.2m. C7.1.6 Fencing, landscaping and other elements on the frontage are designed to eliminate opportunities for concealment. C7.1.7 Bins are not located within the primary street setback or in locations visible from the primary street . C7.1.8 Services and utilities that are located in the primary street setback are integrated into the design of the development and do not detract from the amenity and visual appearance of the street frontage .
	O7.1.2 Street facing development and landscape design retains and enhances the amenity and safety of the adjoining public domain, including the provision of shade.	

8 Pedestrian access and entries

9.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential			
Objectives		Standards	
O8.1.1	Entries and pathways are universally accessible, easy to identify and safe for residents and visitors.	C8.1.1	Pedestrian access which is identifiable from the street and visitor car parking areas and other public areas.
O8.1.2	Entries to the development connect to and address the public domain with an attractive street presence.	C8.1.2	Access for pedestrians which directly fronts the primary street .
		C8.1.3	Developments should distinguish residential entries from retail and other commercial entries.
		C8.1.4	Internal ground floor level to be at grade.
		C8.1.5	Design of balustrades to be integrated into the design of the development.
		C8.1.6	Ramps are not to exceed 50 per cent of the active frontage .

9 Vehicle access

9.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential		
Objectives		Standards
O9.1.1	Vehicle access points are designed and located to provide safe access and egress for vehicles and to avoid conflict with pedestrians, cyclists and other vehicles.	C9.1.1 Service areas and vehicular access should be: • Taken from the rear laneway or secondary street in the first instances. • Collocated where taken from the primary street to maximise the width of active frontages.
O9.1.2	Vehicle access points are designed and located to reduce visual impact on the streetscape .	C9.1.2 Access to on-site car parking spaces to be provided: • Where available, from a right of way available for lawful use to access the relevant lot and which is adequately paved and drained from the property boundary to a dedicated road. • From a secondary street where no right of way exists. • From the primary street frontage where no secondary street or right-of way exists.
		C9.1.3 Access to a right of way is required to be trafficable to the nearest dedicated road . The cost to upgrade a right of way to make it trafficable should be borne by the applicant.
		C9.1.4 Where vehicular access is provided from a street, all vehicles are required to enter and exit the site in forward gear.
		C9.1.5 Roller shutters, doors and screens should be visually permeable .
		C9.1.6 Onsite parking for a development should be located beneath or at the rear of buildings .
		C9.1.7 Where on-site parking provided for customer/client use is not directly visible from the adjacent street, adequate signage should be provided to promote public knowledge of and direction to the car park. This signage should comply with the requirements of the City's Policy relating to signs and advertising policy.
		C9.1.8 Existing trees must not be removed to provide for vehicle access.
		C9.1.9 Each lot should provide a maximum of one crossover.
		C9.1.10 The maximum width of a single crossover is 3m. The maximum width of a double crossover is 5m.
		C9.1.11 The location of crossovers should maximise the ability to provide on-street car parking spaces.
		C9.1.12 Where a crossover meets a pedestrian path there must be clear communication of pedestrian priority. A1.9.13 Crossovers must be setback a minimum of 0.5m from the lot boundary.
		C1.9.13 Crossovers must be setback a minimum of 0.5m from the lot boundary .

10 Car and bicycle parking

10.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential			
Objectives		Standards	
O10.1.1	Parking and facilities are provided for cyclists and other modes of transport including Electric Vehicle charging stations.	C10.1.1	Uncovered at-grade parking is planted with trees at a minimum rate of one tree per four bays to achieve canopy coverage of 60 per cent of the site.
O10.1.2	Car parking provision is appropriate to the location, with reduced provision possible in areas that are highly walkable and/or have good public transport or cycle networks and/or are close to employment centres.	C10.1.2	Secure, undercover bicycle parking is provided in accordance with Local Planning Policy 7.7.1 – Local Planning Policy – Non-Residential Parking.
O10.1.3	Car parking is designed to be safe and accessible.	C10.1.3	Parking is provided for cars and motorcycles in accordance with Local Planning Policy 7.7.1 – Non-Residential Development Parking Requirements.
O10.1.4	The design and location of car parking minimises negative visual and environmental impacts on amenity and the streetscape .	C10.1.4	Car parking and vehicle circulation areas are designed in accordance with AS2890.1 (as amended).
		C10.1.5	Car parking areas are not located within the street setback and are not visually prominent from the street.

11 Managing the impact of noise

11.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential			
Objectives		Standards	
O11.1.1	The siting and layout of development minimises the impact of external noise sources and provides appropriate acoustic privacy to dwellings on adjoining properties .	C11.1.1	Ground floor tenancies within new commercial buildings should provide an acoustic report which demonstrates that they are capable of attenuating noise for a range of land uses including high intensity uses such as small bars, gyms and restaurants.
	Acoustic treatments are used to reduce sound transfer within and between dwellings and to reduce noise transmission from external noise sources.	C11.1.2	Potential noise sources such as garage doors, driveways , service areas, plant rooms, building services, mechanical equipment, active communal open space and refuse bins are not located adjacent to the external wall of dwellings on adjoining properties .

12 Universal design

12.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential			
Objectives		Standards	
O12.1.1	Development includes universal design features providing options for people living with disabilities or limited mobility and/or to facilitate ageing in place.		

13 Facade design

13.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential			
Objectives		Standards	
O13.1.1	Building facades incorporate proportions, materials and design elements that respect and reference the character of the local area.	C13.1.1	Commercial Development which fronts the public realm should provide active frontages including glazing, openings and operable windows to ensure activity, interaction and surveillance of the street.
O13.1.2	Building facades express internal functions and provide visual interest when viewed from the public realm.	C13.1.2	Commercial Ground floor spaces should have a maximum width of 9m and a finished floor level to finished ceiling level height of a minimum of 3.5m.
		C13.1.3	Commercial Development should provide a continuous protective awning over the pedestrian footpath.
		C13.1.4	Development should identify key design elements in the local area and streetscape through an Urban Design Study and integrate and acknowledge these design elements whilst avoiding the use of faux materials.
		C13.1.5	Commercial Building facades visible from the public realm should: • Incorporate a variety of materials, colours, textures and depths. • Not present a blank, monotonous, repetitious or dominant building treatment. • Incorporate architectural or functional elements integrated into the facade, rather than cosmetic or superficial attachments to the building. • Incorporate vertical articulation by using tall and narrow façade treatments. • Incorporate articulation such as doorways, windows, seating ledges, sills, stall risers and other detailing. • Minimise use of shouldow framings systems and thin wall/glazing systems. • Integrate fire boosters, mail boxes and external fixtures into the building design or screen them so they appear as part of the facade. • Integrate signage into the design and articulation on the ground floor.
		C13.1.6	Where provided, doorways should have a depth between 500mm and 1.5m to clearly articulate entrances to commercial buildings and tenancies.
		C13.1.7	Where provided, windows, seating ledges, sills, stall risers and other detailing should have a minimum depth of 300mm.
		C13.1.8	Where provided, stall risers should be a minimum height of 450mm.
		C13.1.9	Commercial Ground floor glazing and/or tinting should have a minimum of 70 per cent visible light transmission to provide unobscured visibility.
		C13.1.10	Security measures should be: • Located and installed internally behind the glazing line or recessed between elements in the façade such as columns or doorway recesses. • Transparent and visually permeable to allow views inside the building and enable internal light sources to be seen from the street.
		C13.1.11	Where provided, awnings should be: • A minimum height of 3.5m and a maximum height of 4m from finished floor level to the underside of the awning to accommodate under awning signage. • Be setback a minimum of 600mm from the face of kerb. • Respond to any existing and/or proposed verge trees. • Respond to the height, depth and form of existing awnings on the subject and adjoining buildings. • Respond to the slope of the site. • Integrated with the design of the facade.
		C13.1.12	Verandahs and collonades are only permitted where they are constructed wholly within the lot boundaries of development site.

14 Roof design

14.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential			
Objectives		Standards	
O14.1.1	Roof forms are well integrated into the building design and respond positively to the street.	C14.1.1	The roof form or top of building complements the façade design and desired streetscape character.
O14.1.2	Where possible, roof spaces are utilised to add open space , amenity , solar energy generation or other benefits to the development.	C14.1.2	Building services located on the roof are not visually obtrusive when viewed from the street.
		C14.1.3	Useable roof space is safe for users and minimises overlooking and noise impacts on adjoining sites.
		C14.1.4	Flat roof structures that are not visible from the street or adjacent properties should have a maximum solar absorptance rating of 0.4.
		C14.1.5	Pitched roof structures or roof structures that are visible from the street or adjacent properties should have a maximum solar absorptance rating of 0.5, unless a suitable alternative is identified in the Urban Design Study.

15 Landscape design

15.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential			
Objectives		Standards	
O15.1.1	Landscape design enhances streetscape and pedestrian amenity , and improves the visual appeal of the development.	C15.1.1	Submission of a landscape plan prepared by a registered landscape architect. This should include a species list and irrigation plan.
O15.1.2	Plant selection is appropriate to the orientation, exposure and site conditions and is suitable for the adjoining uses.	C15.1.2	Landscaped areas are located and designed to support mature, shade-providing trees.
O15.1.3	Landscape design includes water efficient irrigation systems and where appropriate incorporates water harvesting or water re-use technologies.	C15.1.3	Building services fixtures are integrated in the design of the landscaping and are not visually intrusive.
O15.1.4	Landscape design is integrated with the design intent of the architecture including its built form, materiality, key functional areas and sustainability strategies.		

16 Adaptive reuse

16.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential			
Objectives		Standards	
O16.1.1	New additions to existing buildings are contemporary and complementary and do not detract from the character and scale of the existing building .	C16.1.1	New additions to buildings that have heritage value do not mimic the existing form and are clearly identifiable from the original building .
		C16.1.1	New additions complement the existing building by referencing and interpreting the scale, rhythm and materiality of the building .

17 Water management and conservation

17.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential			
Objectives		Standards	
O17.1.1	Minimise potable water consumption throughout the development.	C17.1.1	Stormwater runoff generated from small rainfall events is managed on-site.
O17.1.2	Stormwater runoff from small rainfall events is managed on-site, wherever practical.	C17.1.2	Provision of an overland flow path for safe conveyance of runoff from major rainfall events to the local stormwater drainage system.
O17.1.3	Reduce the risk of flooding so that the likely impacts of major rainfall events will be minimal.		

18 Waste management

18.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential			
Objectives		Standards	
O18.1.1	Waste storage facilities minimise negative impacts on the streetscape and building entries.	C18.1.1	Sufficient area is provided to accommodate the required number of bins for the separate storage of green waste, recycling and general waste.
O18.1.2	Waste to landfill is minimised by providing safe and convenient bins and information for the separation and recycling of waste.	C18.1.2	Communal waste storage is sited and designed to be screened from view from the street.
		C18.1.3	Where there is an increased waste requirement, an area for waste management must be provided in accordance with the City's Waste Requirement Guidelines.

19 Utilities

19.1 Town Centre, Activity Corridor, Mixed Use, Transit Corridor and Residential			
Objectives		Standards	
O19.1.1	The site is serviced with power, water, gas (where available), wastewater, fire services and telecommunications/broadband services that are fit for purpose and meet current performance and access requirements of service providers.	C19.1.1	Utilities that must be located within the front setback , adjacent to the building entry or on visible parts of the roof are integrated into the design of the building , landscape and/or fencing such that they are accessible for servicing requirements but not visually obtrusive.
O19.1.2	All utilities are located such that they are accessible for maintenance and do not restrict safe movement of vehicles or pedestrians.		
O19.1.3	Utilities, such as distribution boxes, power and water meters are integrated into design of buildings and landscape so that they are not visually obtrusive from the street.		

20 Street walls and fences

20.1 Transit Corridor and Residential		
Objectives	Standards	
O20.1.1 Front fences and walls which enable surveillance and enhance streetscape . O20.1.2 Development which adds interest to the street and minimises blank facades.		
	C20.1.1	Street walls, fences and gates should be of a style and materials compatible with those of the development on site and/or walls, fences and gates of the immediate surrounding area excluding fibre cement.
	C20.1.2	Street walls, fences and gates within the primary street setback area , including along the side boundaries, and front walls and fences to new development fronting a right of way or dedicated road to be as follows: - Maximum height of 1.8m above the natural ground level; - Maximum height of piers with decorative capping to be 2m above the natural ground level; - Maximum height of solid portion of wall to be 1.2m above adjacent footpath level and should be visually permeable above 1.2m; - Posts and piers should have a maximum width 400mm and a maximum diameter of 500mm; and - The distance between piers should not be less than the height of the piers except where pedestrian gates are proposed.
	C20.1.3	Street walls, fences and gates to secondary streets , behind the primary street setback line , or walls, fences and gates to the primary streets where those streets are district distributor roads to be as follows: - Solid portion of wall may increase to a maximum height of 1.8m above adjacent footpath level provided that the wall or fence has at least two significant appropriate design features (to the satisfaction of the City of Vincent) to reduce the visual impact – for example, significant open structures, recesses and/or planters facing the road at regular intervals and varying materials, finishes and/or colours. - Maximum height of piers with decorative capping to be 2m above adjacent footpath level.
	C20.1.4	Exposed boundary walls visible to the street should incorporate the following design features: - indentations - varying heights - varying materials, colours and textures - public artwork
	C20.1.5	Any proposed vehicular or pedestrian entry gates should be visually permeable .
	C20.1.6	Walls and fences on the side boundaries, only within the primary street setback area , constructed from metal sheeting are permitted provided they meet all other requirements relating to height , provide adequate sight lines and are not a side boundary fence facing a secondary street .

21 Setback of garages and carports

22.1 Residential		
Objectives	Standards	
O21.1.1 The setting back of carports and garages to maintain clear sight lines along the street and not to detract from the streetscape or appearance of buildings ; or obstruct views of buildings from the street and vice versa.	O21.1.1	Garages should be setback a minimum of 500mm behind the building line.
O21.1.2 Development which preserves and enhances the visual character of the existing streetscape by considering building bulk, scale, setbacks and design.	O21.1.2	Garages and carports must match the existing building's predominant colour, scale and materials and must be complementary and subservient to the building .
	O21.1.3	Carports must provide an unobstructed view to the building from the street. Gates or doors to carports are required to be visually permeable .
	O21.1.4	Carports should allow light and ventilation to the building .
	O21.1.5	The total width of any carport within the street setback area is not to exceed 50 per cent of the frontage (including strata lots) of the lot or sixm whichever is the lesser.

22 Garage width

23.1 Residential		
Objectives	Standards	
O22.1.1 Development which preserves and enhances the visual character of the existing streetscape .	C22.1.1	Garages which are 50 per cent or less than the width of the lot.
	C22.1.2	For lots which are 10m wide or less, a garage should be a maximum width of 4m.

23 Development of rights-of-way

23.1 Residential		
Objectives	Standards	
O23.1.1 Development which appropriately addresses rights of way to facilitate spaces which are welcoming and safe.	C23.1.1	Development on rights of ways should be in accordance with the Western Australian Planning Commission's Planning Bulletin 33 Rights of Way or Laneways in Established Areas – Guidelines.
O23.1.2 Development which provides suitable space for safe vehicle movement in the right of way .	Orientation C23.1.2	Where a building's primary street frontage is a right of way , or where no primary street or secondary street frontage exists, should to be oriented to address the right of way using clearly defined entry points and major openings as if it were a primary street .
	Setbacks C23.1.3	Development must be setback 1m from a right of way . If the site is subject to right of way widening, the setback is measured from the new lot boundary after the widening is applied.
	Access C23.1.4	Access to a right of way is required to be trafficable to the nearest dedicated road . The cost to upgrade a right of way to make it trafficable should be borne by the applicant.



APPENDICES

APPENDIX 1 DESIGN PRINCIPLES

1. Context and character

Good design responds to and enhances the distinctive characteristics of a local area, contributing to a sense of place.

The distinctive characteristics of a local area include its prominent natural and built features, the overall qualities of its built environment, significant heritage elements, as well as social, economic and environmental conditions.

Good design responds intelligently and sensitively to these factors, interpreting rather than replicating existing features and enhancing the identity of the area, including the adjacent sites, **streetscape** and neighbourhood.

Good design also responds positively to the intended future character of an area. It delivers appropriate densities that are consistent with projected population growth, and are able to be sustained by existing or proposed transport, green networks and social infrastructure.

Consideration of local context is particularly important for sites in established areas that are undergoing change or identified for change.

2. Landscape quality

Good design recognises that together landscape and buildings operate as an integrated and sustainable system, within a broader ecological context.

Good landscape design protects existing environmental features and ecosystems, enhances the local environmental context and regenerates lost or damaged ecosystem functionality, where possible. It balances consideration of environmental factors such as water and soil management, ground conditions, solar access, microclimate, tree canopy, habitat creation and preservation of green infrastructure with social, cultural and economic conditions.

Good landscape design employs hard and soft landscape and urban design elements to create external environments that interact in a considered manner with built form, resulting in wellintegrated, engaging places that contribute to local identity and **streetscape** character.

Good landscape design provides optimal levels of external **amenity**, functionality and weather protection while ensuring social inclusion, equitable access and respect for the public and neighbours. Well-designed landscape environments ensure effective establishment and facilitate ease of long term management and maintenance.

3. Built form and scale

Good design provides development with massing and height that is appropriate to its setting and successfully negotiates between existing built form and the intended future character of the local area.

Good design achieves an appropriate built form by responding to its site, as well as surrounding built fabric, in a considered manner, mitigating negative impacts on the **amenity** of neighbouring properties and public realm.

Good design considers the orientation, proportion, composition, and **articulation** of built form elements, to deliver an outcome that is suited to the **building's** purpose, defines the public

domain, respects important views, contributes to the character of adjacent **streetscapes** and parks, and provides a good pedestrian environment at ground level.

4. Functionality and build quality

Good design meets the needs of users efficiently and effectively, balancing functional requirements to deliver optimum benefit and performing well over the full life cycle.

Designing functional environments involves ensuring that spaces are suited to their intended purpose and arranged to facilitate ease of use and good relationships to other spaces. Good design provides flexible and adaptable spaces, to maximise utilisation and accommodate appropriate future requirements without the need for major modifications.

Good build quality is achieved by using good quality and robust materials, finishes, elements and systems. Projects should be well-detailed, resilient to the wear and tear expected from its intended use, and easy to upgrade and maintain.

Good design accommodates required services in an integrated manner, without detriment to the overall design outcome.

5. Sustainability

Good design optimises the sustainability of the built environment, delivering positive environmental, social and economic outcomes.

Sustainable **buildings** incorporate effective environmental design measures that respond to local climate and site conditions by providing optimal orientation, shading, thermal performance and natural ventilation. Reducing reliance on energy intensive systems for heating and cooling improves energy efficiency, minimises resource consumption and reduces operating costs over the entire life-cycle of the **building**.

Other sustainable design measures may also include the use of sustainable construction materials, recycling, material re-use, harnessing of renewable energy sources, appropriate water management and/or adaptive re-use of existing **buildings**. Good design considers the ease with which sustainability initiatives can be maintained and managed.

Sustainable landscape and urban design adheres to established principles of water-sensitive urban design, and minimises negative impacts on existing natural features and ecological processes, as well as facilitating green infrastructure at all project scales.

6. Amenity

Good design optimises internal and external amenity for occupants, visitors and neighbours, contributing to living and working environments that are comfortable and productive.

Good design provides internal rooms and spaces that are adequately sized, comfortable and easy to use and furnish, with good levels of daylight, natural ventilation and outlook. Delivering good levels of internal **amenity** also includes the provision of appropriate levels of acoustic protection and visual privacy, adequate storage space, and ease of access for all.

Well-designed external spaces provide welcoming, comfortable environments that are universally accessible, with effective shade as well as protection from unwanted wind, rain, traffic and noise. Good design mitigates negative impacts on surrounding **buildings** and places, including overshadowing, overlooking, glare, reflection and noise.

7. Legibility

Good design results in buildings and places that are legible, with clear connections and memorable elements to help people find their way around.

Good urban design makes places easy to navigate, with recognisable routes, intersections and landmarks while being well-connected to existing movement networks. Sightlines are wellconsidered, with built form responding to important vantage points.

Within **buildings**, legibility is served by a clear hierarchy of spaces with identifiable entries and clear wayfinding. Externally, **buildings** and spaces should allow their purpose to be easily understood, and provide clear distinction between public and private spaces.

Good design provides environments that are logical and intuitive, at the scale of **building**, site and precinct.

8. Safety

Good design optimises safety and security, minimising the risk of personal harm and supporting safe behaviour and use.

Safety and security is promoted by maximising opportunities for **passive surveillance** of public and communal areas and providing clearly defined, well-lit, secure access points that are easily maintained and appropriate to the purpose of the development.

Good design provides a positive, clearly defined relationship between public and private spaces and addresses the need to provide optimal safety and security both within a development and to adjacent public realm.

Designing for safety also involves mitigating any potential occupational safety and health hazards that might result from a development during its construction, maintenance and operation.

9. Community

Good design responds to local community needs as well as the wider social context, providing buildings and spaces that support a diverse range of people and facilitate social interaction.

Good design encourages social engagement and physical activity in an inclusive manner, enabling stronger communities and improved public health outcomes.

In residential developments, good design achieves a mix of **dwelling** types, providing housing choice for different demographics, living needs and household budgets, and facilitating ageingin-place.

10. Aesthetics

Good design is the product of a skilled, judicious design process that results in attractive and inviting buildings and places that engage the senses.

Good design resolves the many competing challenges of a project into an elegant and coherent outcome. A well-conceived design concept informs all scales, from the **articulation** of **building** form through to materiality and detail, enabling sophisticated, integrated responses to the complexities of local built form and landscape character.

In assessing design quality, consideration of aesthetics should not be limited to style and appearance; it should also account for design integrity, creativity, conceptual coherence and cultural relevance in a proposal.

APPENDIX 2 DEFINITIONS

Unless otherwise defined in this Policy, terms used are to be interpreted as defined in the Residential Design Codes (Volumes 1 and 2).

Active Frontage – A ground floor space where there is visual and/or physical engagement between those in the street and those on the ground floors of **buildings**.

Articulation – Architectural composition in which elements and parts of the **building** are expressed logically, distinctly, and consistently, with clear joints. For the purposes of this Policy **articulation** refers to points within a **dwelling** that clearly distinguish one part of the **dwelling** from another, such as **setback** between the ground and upper floors and indentations or ‘breaks’ within **building** walls.

Awning – A roof like structure attached to a **building** to provide shelter.

Clear Sight Line – Continuous horizontal or vertical gaps that constitute a minimum of 50 per cent of the total surface area;

- A minimum gap size of 40mm;
- If slats are orientated to be deeper than they are wide – the distance between the slats must be no less than two-times the depth of the slat; and
- Clear non-reflective glass.

Dedicated Road – A road which has been committed to public use in accordance with the Land Administration Act 1997.

Planting Area – An area, with a minimum soil depth and dimension of 1 metre that supports growth of medium to large canopy trees.

R Codes Volume 1 – Residential Design Codes Volume 1 (as amended).

R Codes Volume 2 – Refers to Residential Design Codes Volume 2 - Apartments (as amended).

Solar Absorptance – The proportion of incident solar radiation that is absorbed by an external surface when exposed to the sun.

Visible Light Transmission – Light passing directly through glass.



APPENDIX 3 – STREETSCAPE CHARACTER

Housing Type	Key Features		
	Roof Form	Materials	Exterior Feature
Late Colonial Georgian Dwellings (pre 1890)	Low pitched roof.	- Corrugated iron roofing. - Painted wall finish or smooth textured walling of stucco, painted white or yellow. - Simple, double-hung sash windows.	Verandah erected around the dwelling, often to the rear skillion, to protect the principal rooms from the penetrating sun. Verandah usually a lower pitched extension of the main roof.
Queen Anne Federation (1895 – 1915)	Dominant roof form, often broken by false gables.	- Roof capped by terracotta frilled ridges. - Red brick walls (though some built of stone or timber). - Leadlight windows. - Use of subtle colours such as cream and brown or cream and red.	Verandah under the main roof, featuring decorative timber work and floor tiles.
Federation Bungalows (1890 – 1915)	- Simple hipped roofs often with a protecting gable. Witches hats, gablets and various gables feature in grander bungalows. - Roofs are usually steeply sloped with wide eaves.	- Tuck pointed brick material for the dwelling. - Roofs are covered in terracotta tiles or painted corrugated metal. - Round bullseye to multi-paned and coloured casement sash window, often with leadlights featuring Australian flora or fauna.	Verandah ornamented with turned timber or cast iron columns, balustrades and a frieze.
Weatherboard Dwelling (1900 – 1930s)	Simple hipped roofs.	- Modest structure of simple design with no ornamentation. - Corrugated iron roofs. - Weatherboard walls, painted in whites, creams and green colours. - Timber sash windows place in the middle of each room often flanking a central doorway.	Full width verandah or no verandah.
Inter-War Californian Bungalows (1920s – 1945)	Low-pitched roofs emphasising horizontal lines.	- Lower portion of wall brown brick, roughcast or pebble dash render or weatherboard walls. - Upper portion of wall rendered and painted in oft-white, beige or cream. - Roofs are covered in terracotta tiles. - Windows either double hung o casement, with panes in small rectangles or diamonds or featuring Art Nouveau or Arts and Crafts patterned stained glass.	Deep, shady verandah under a low pitch or flat roof. Verandah posts are heavily built.
Post War Bungalows (1945 – 1960s)	- Hipped/gabled roofs with a low-lying gable of around 30 degrees. - Flat roofs introduced in more contemporary designs.	- Plain red brick or fibro walls and chimneys with minimal exterior decorative elements. - Plain timber or aluminium windows. - Cement roof tiles.	Rectangular or L-shaped house, with minimal or no verandah.



CITY OF VINCENT

CONTACT US

To find out more, or share your thoughts and ideas,
contact us at:

E: mail@vincent.wa.gov.au

W: vincent.wa.gov.au

P: 9273 6000